



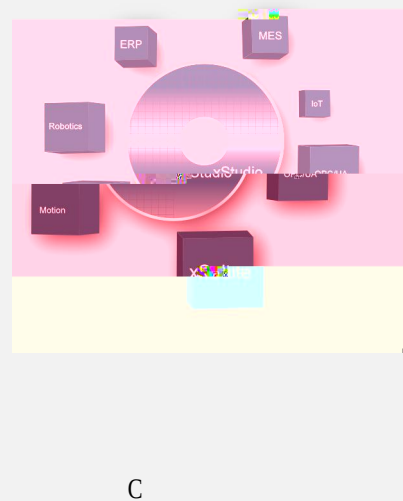

XC3000S

XC3000S Laser Cutting System User Manual

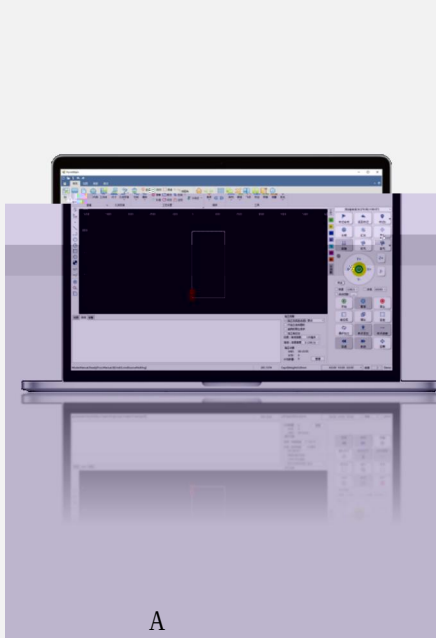

ã+s -, ~ 1~ ã 1 γ 3 N

$$\chi \quad \Xi$$

1		1
1.1		1
1.1.1		1
1.1.2		1
1.1.3		2
1.1.4		3
1.2		5
1.2.1		5
1.2.2		6

2.1.13		31
2.1.14		32
2.1.15		34
2.1.16		35
2.1.17		36
2.1.18		37
2.1.19		37
2.1.20		39
2.1.21		40
2.1.22		42
2.1.23		43
2.1.24		45
2.1.25		45
2.1.26		46
2.1.27		46
2.2		48
2.2.1		48
2.2.2		48
2.2.3		49
2.2.4		49
2.2.5		50
2.2.6		50
2.2.7		50
2.2.8		50
2.2.9		51
2.2.10		51
2.2.11		51
2.3		51
2.3.1		52
2.3.2		54
2.3.3		54
2.3.4		55

5.10		98
5.11		98
5.12		98
5.13		98
5.14		99
5.15		101
5.16		102
5.17		103
5.18		104
5.19		104
5.20		104
6		104
6.1		104
6.2		105
6.3		105



文件



5 β ã ã

6 β m d

7 β 3 È

$$8 \beta \nabla \dot{U} \vdash 1$$
$$9\beta \ni \tilde{A} \int \gamma$$


: β ۹ ã È ã ۳ 3

$$; \beta \quad ' \quad \text{H} \quad \dot{\text{S}} \quad \text{T}$$

< β q ū š τ

43 β ε 0

41515 9 $\ddot{H}$

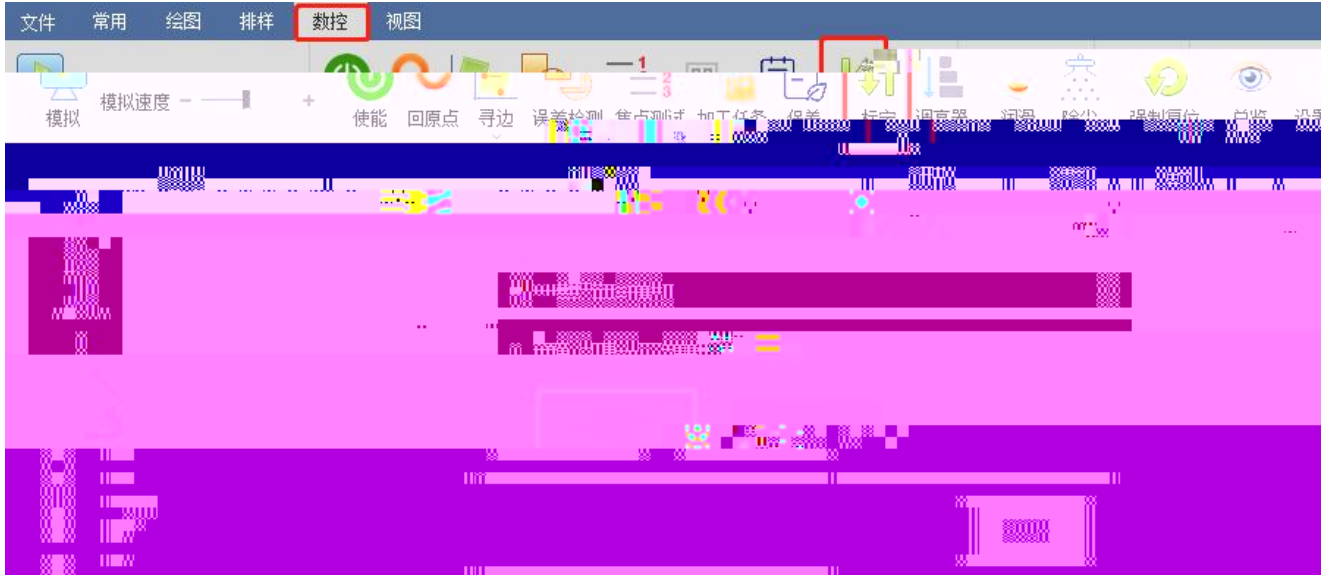

41516 m d f E z y s P





556222V 0° X' X 0.4 0.1°

41517

Å

ñ - -

WQ[A5abc P b(bD


41519 | § | ٧




模拟速度 - — — — +

4151: H ف ا §


预览

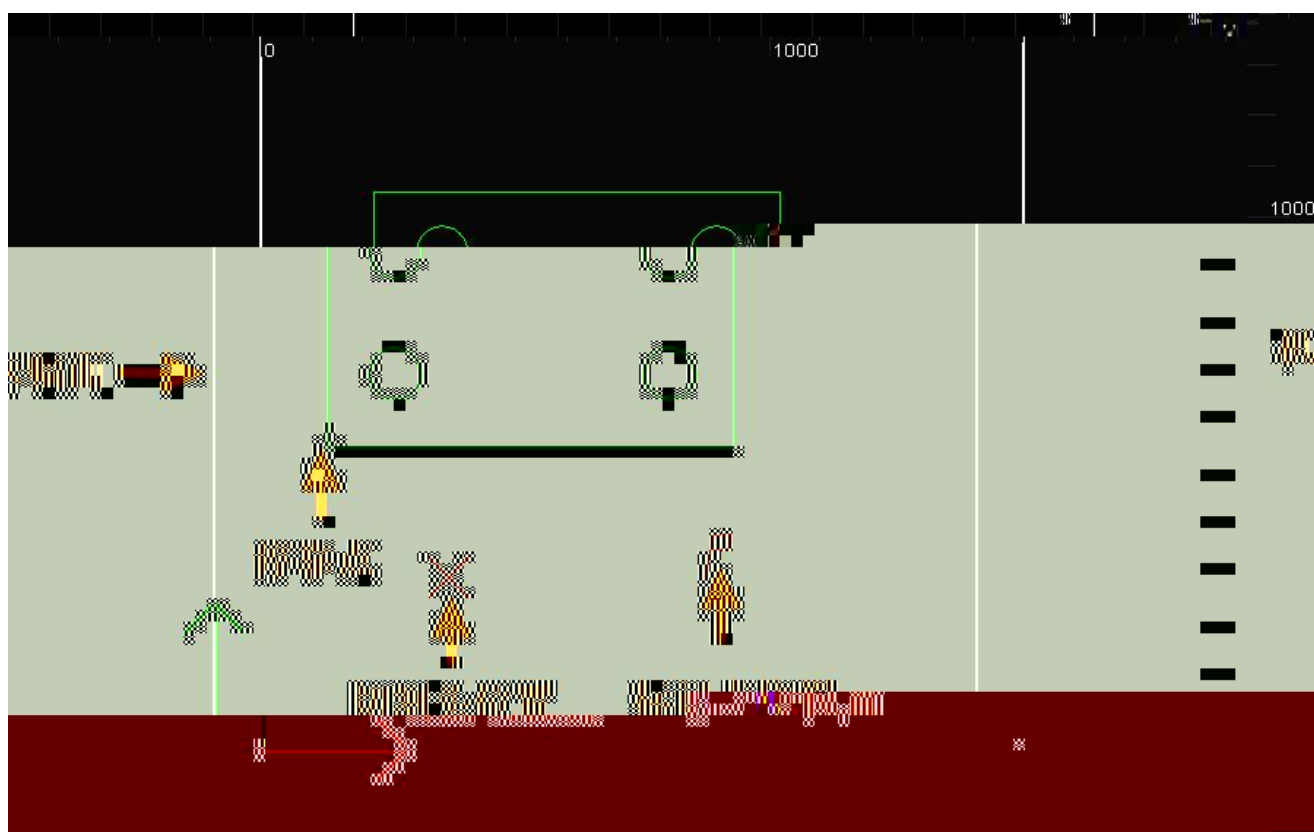



4151; ⅈ ѱ ѱ' ⅈ

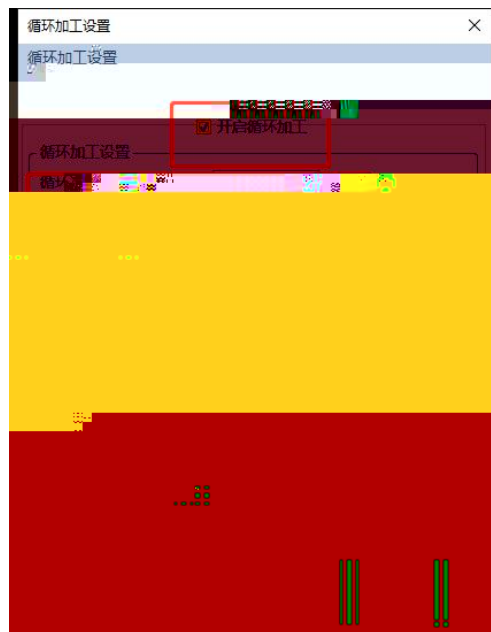


$$5 \int \dot{E}^2 \Omega$$

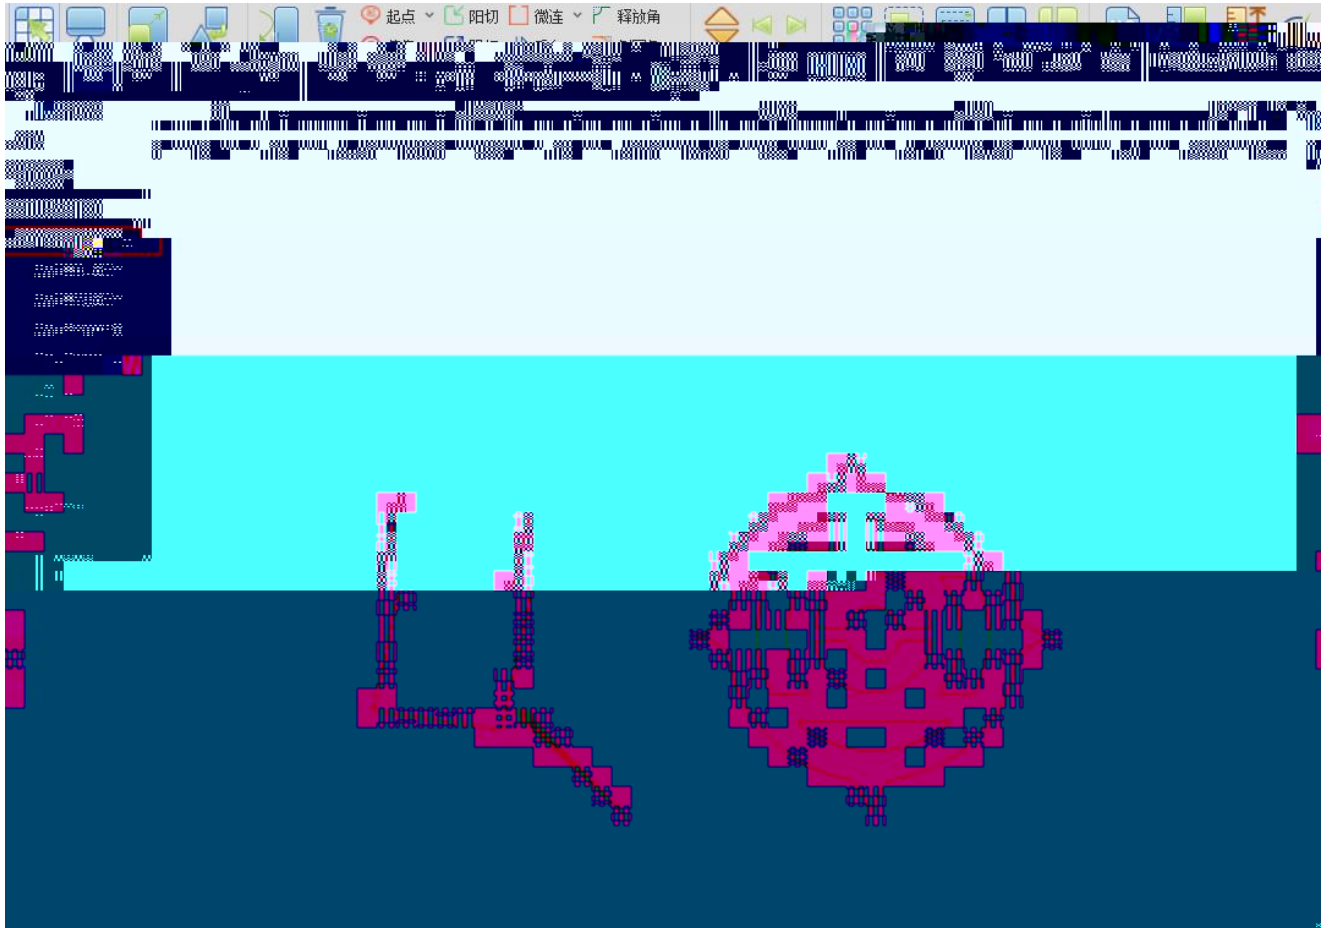


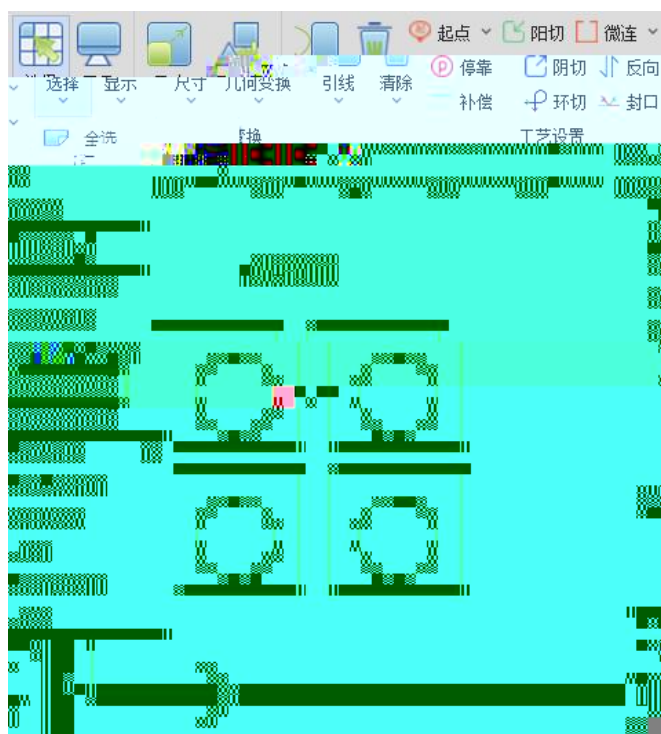

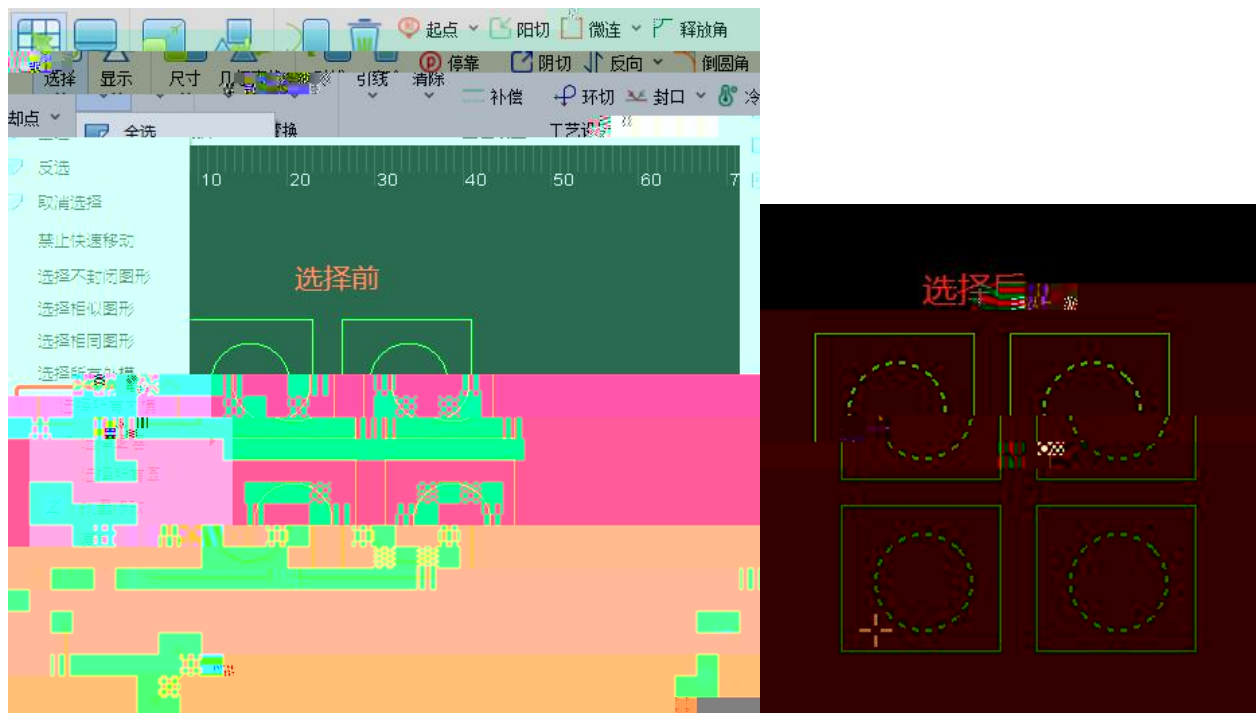


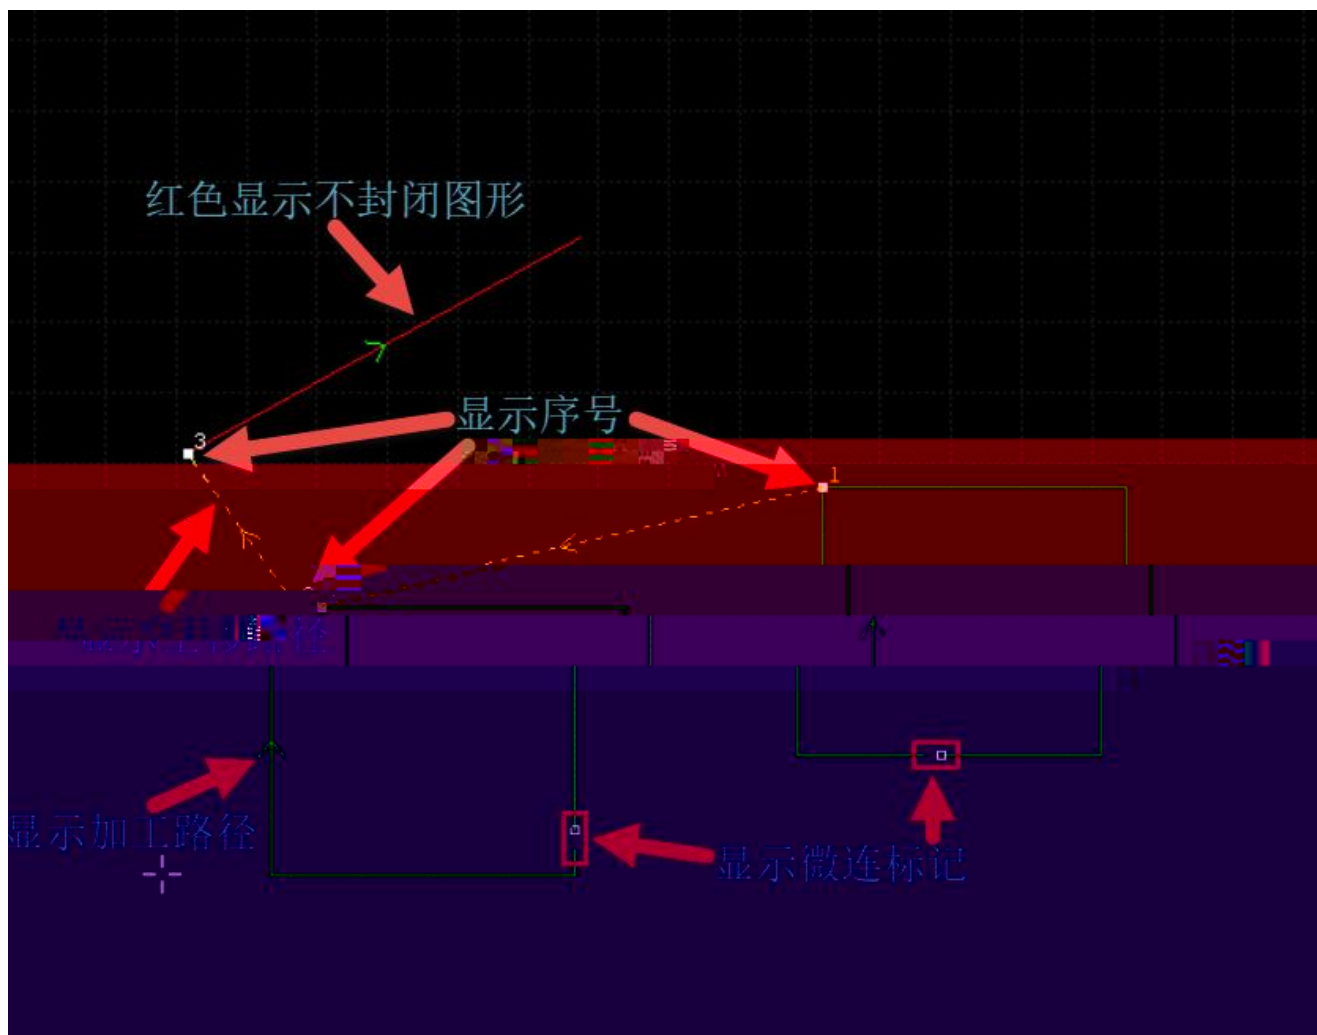

51416 QF H Ì

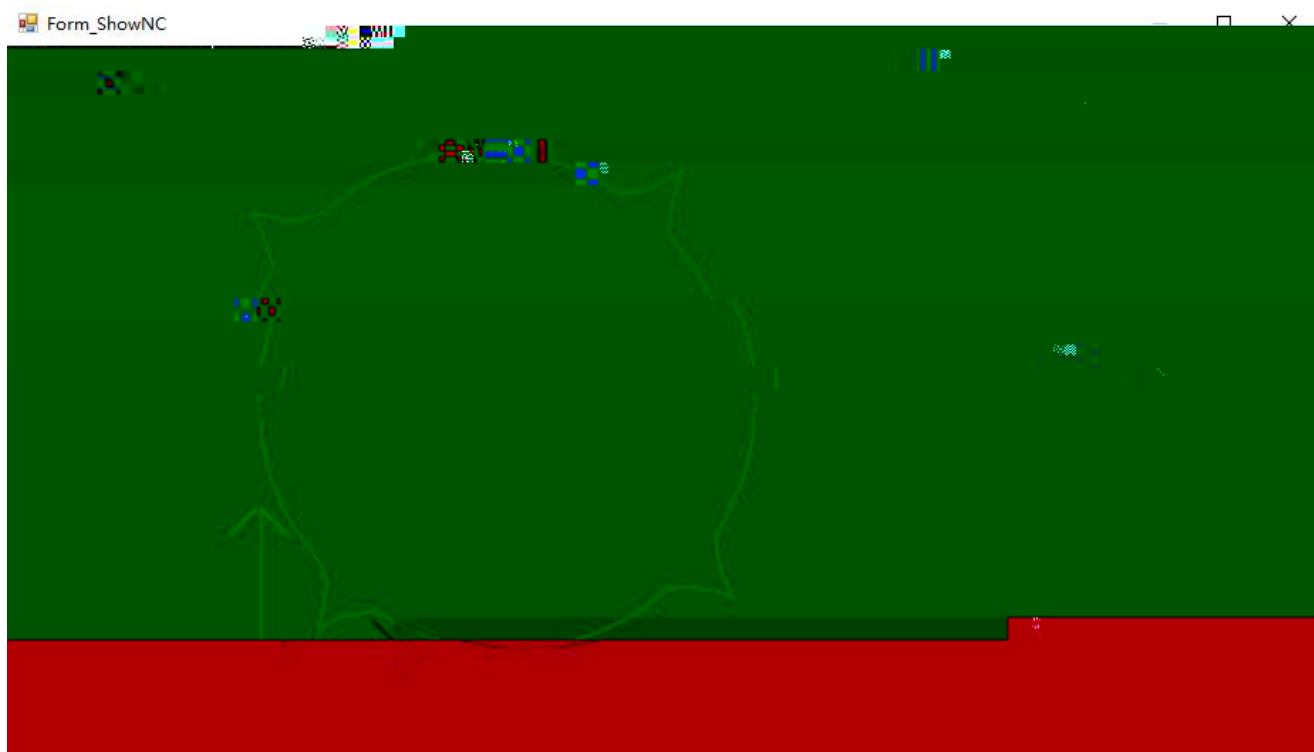


51417 Ò ¼

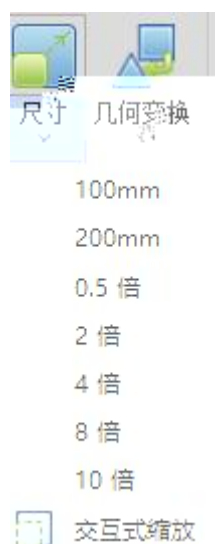


[F6333



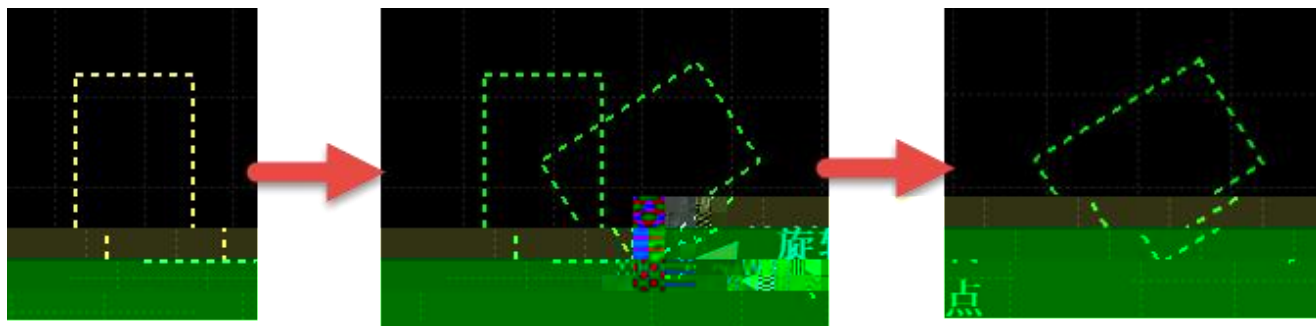


51419 ã v

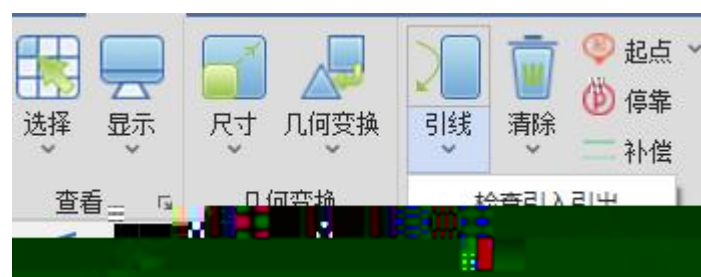


5141: F 9




5141; 6

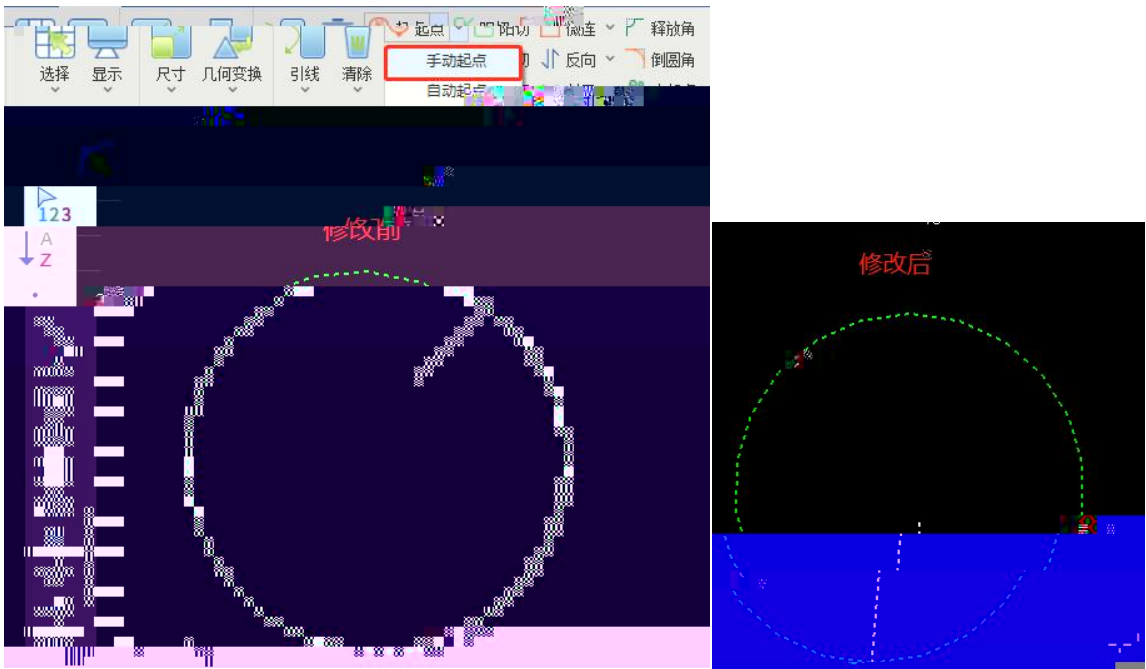

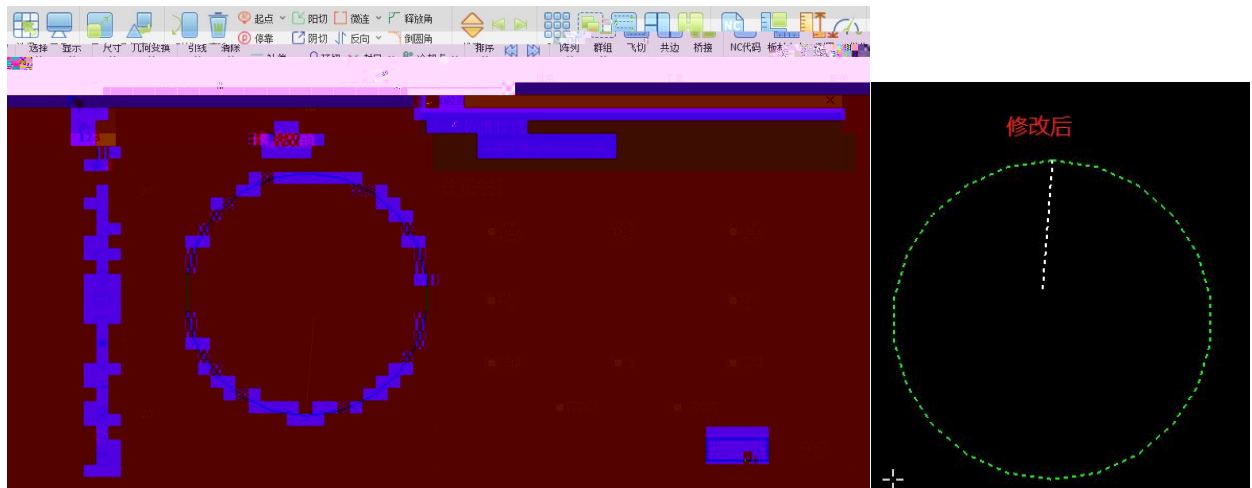


5141< 5 5

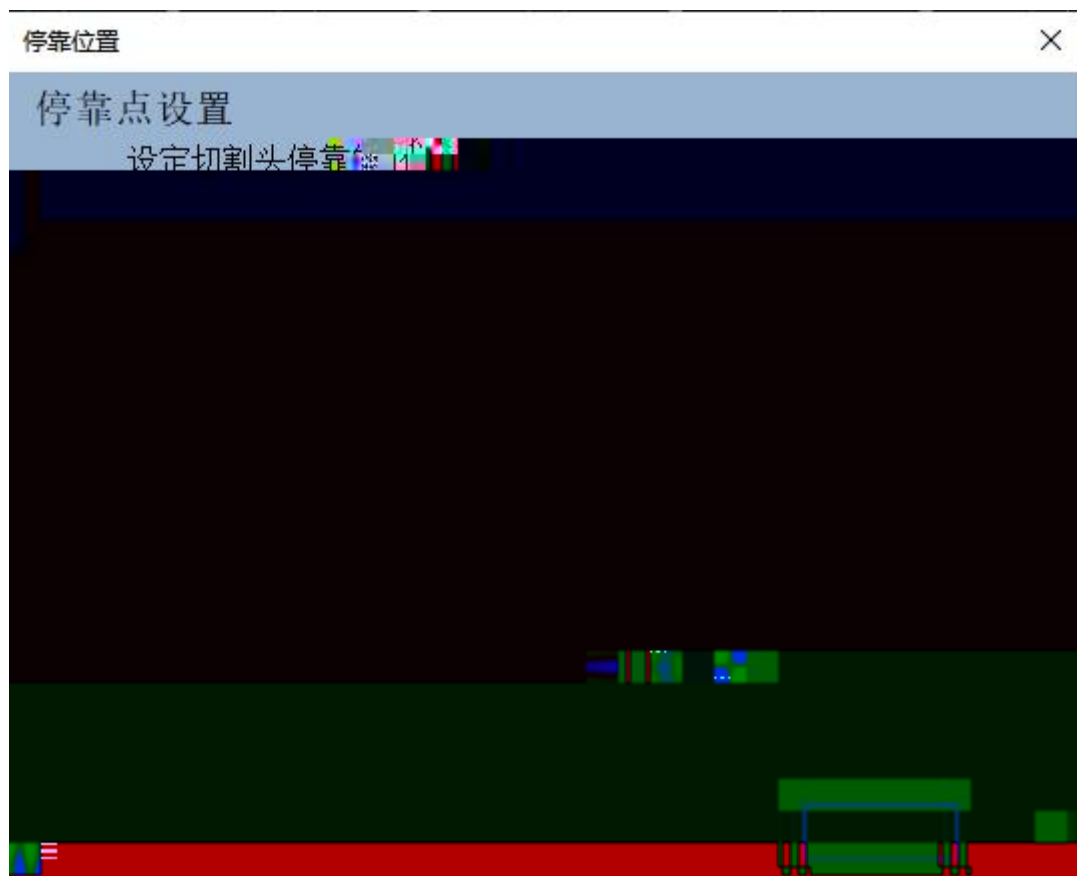


514143 □ Ÿ



514146 J ' .

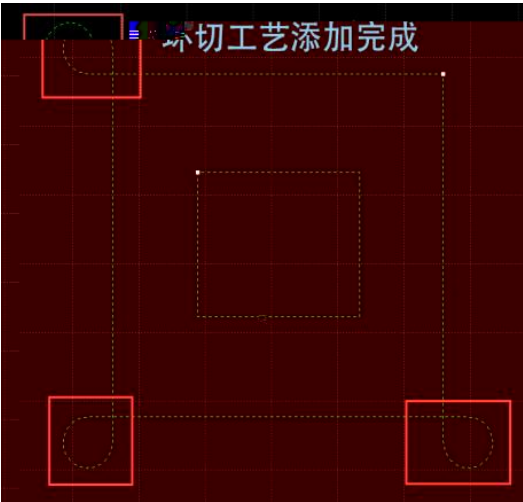



514147 I 9

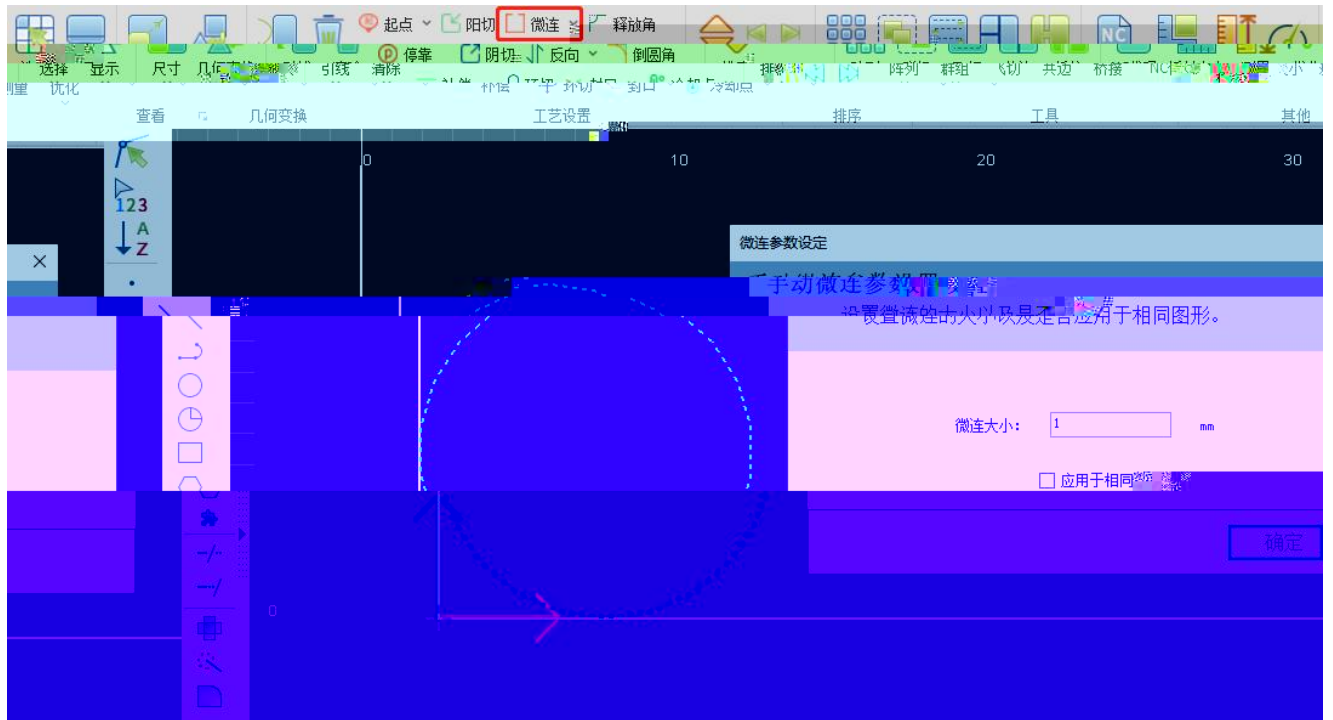





514149 0'

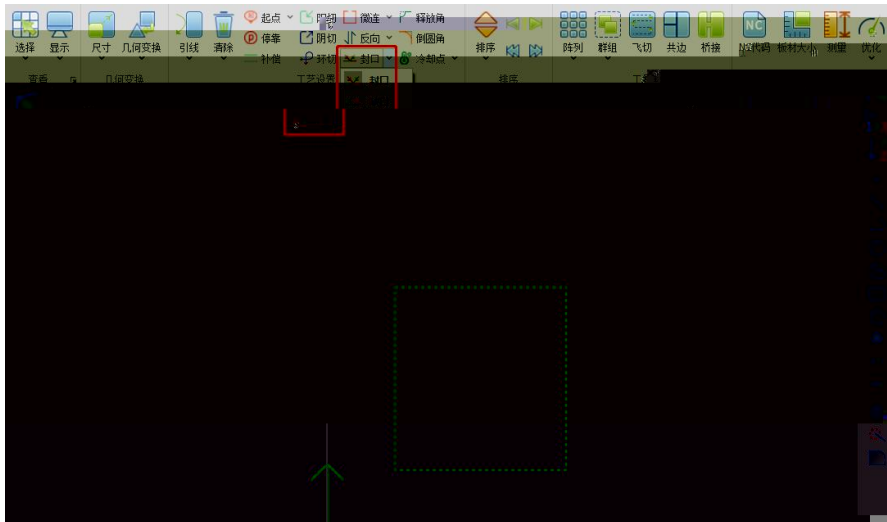



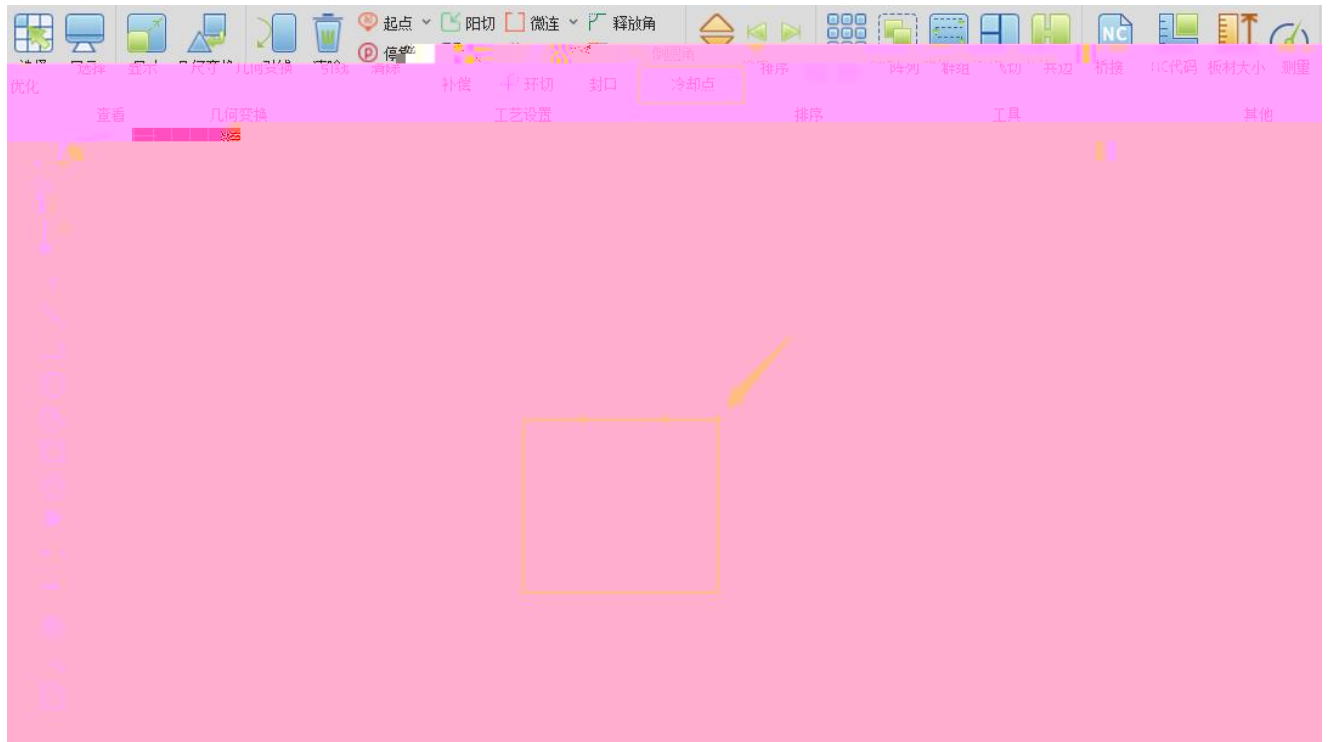






514154 ґ




@ b9P0D@H0E€

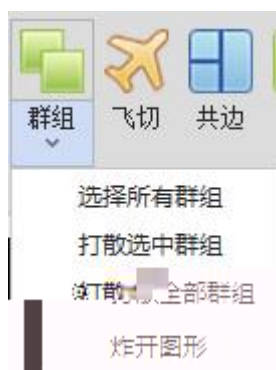

514156 ჯ.

514157 儿 ·

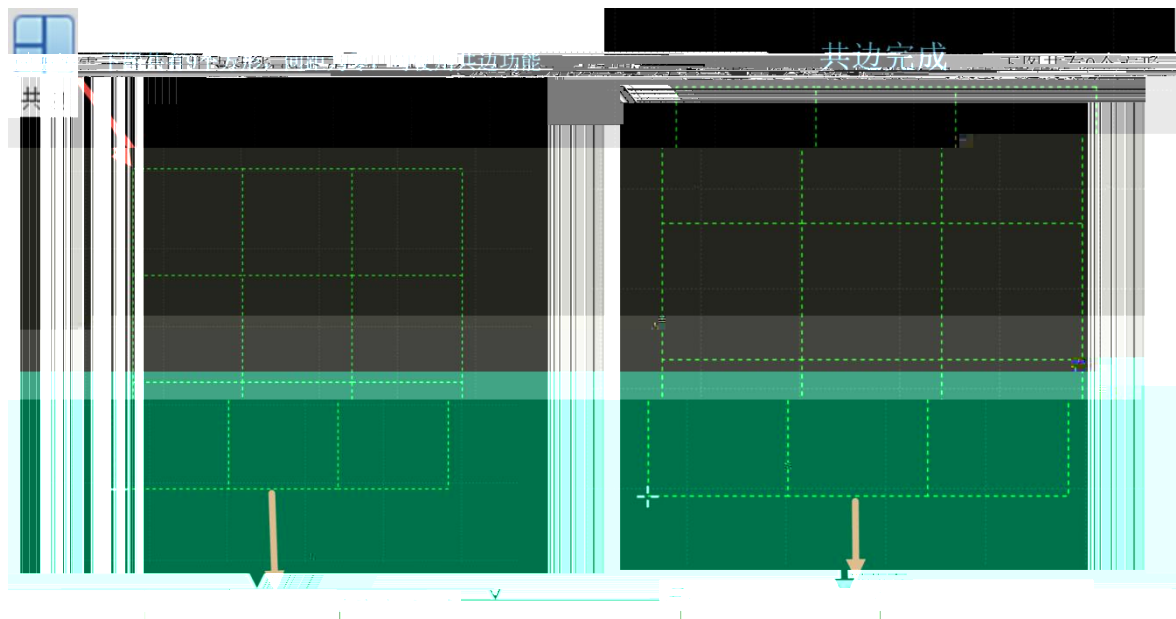

514158 „ ò





514159 ≡ 3



51415: 4 3


k

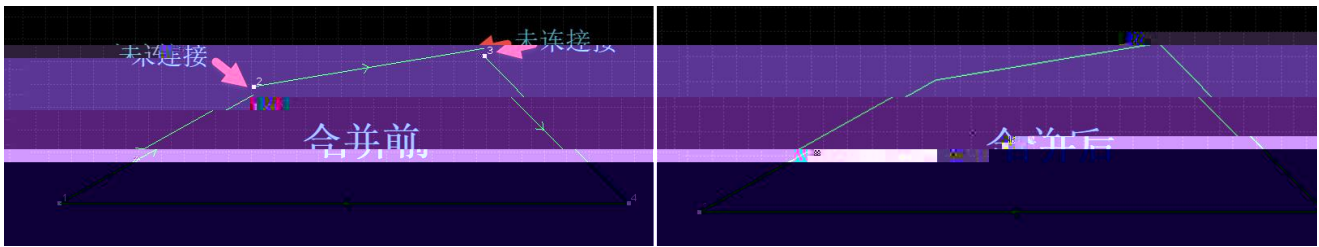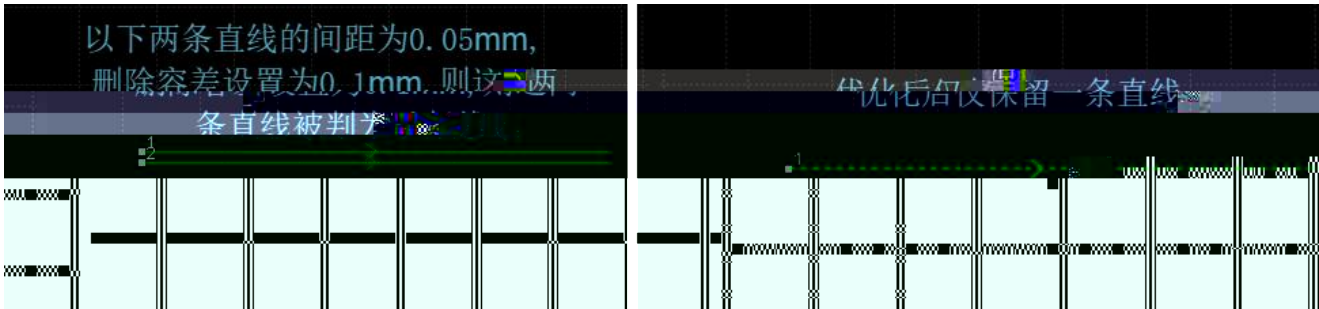

515 1 f

51514 3 V

51515 2 E

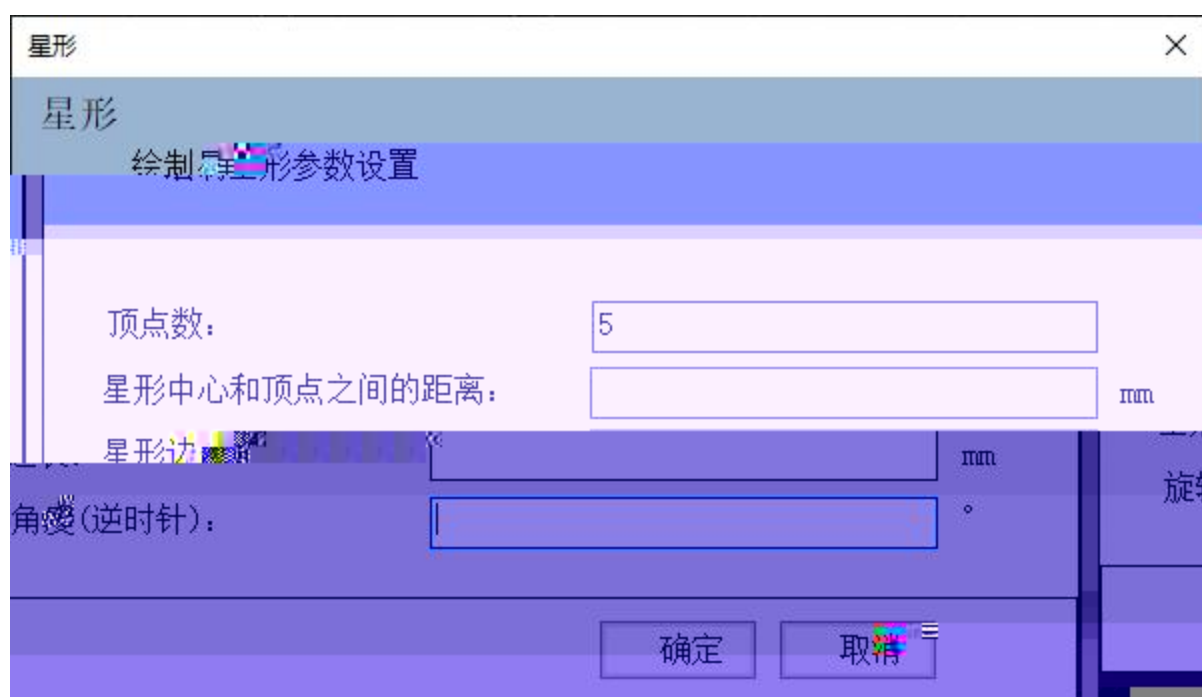

51518 c


51519 ñ d

5151: U r

5151; Å b


Г1Г1, А, А1

515142 5 7 11 1 5


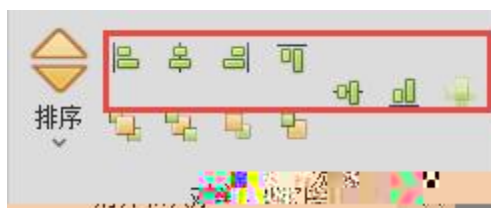


E1E144 u N

FIG. 3

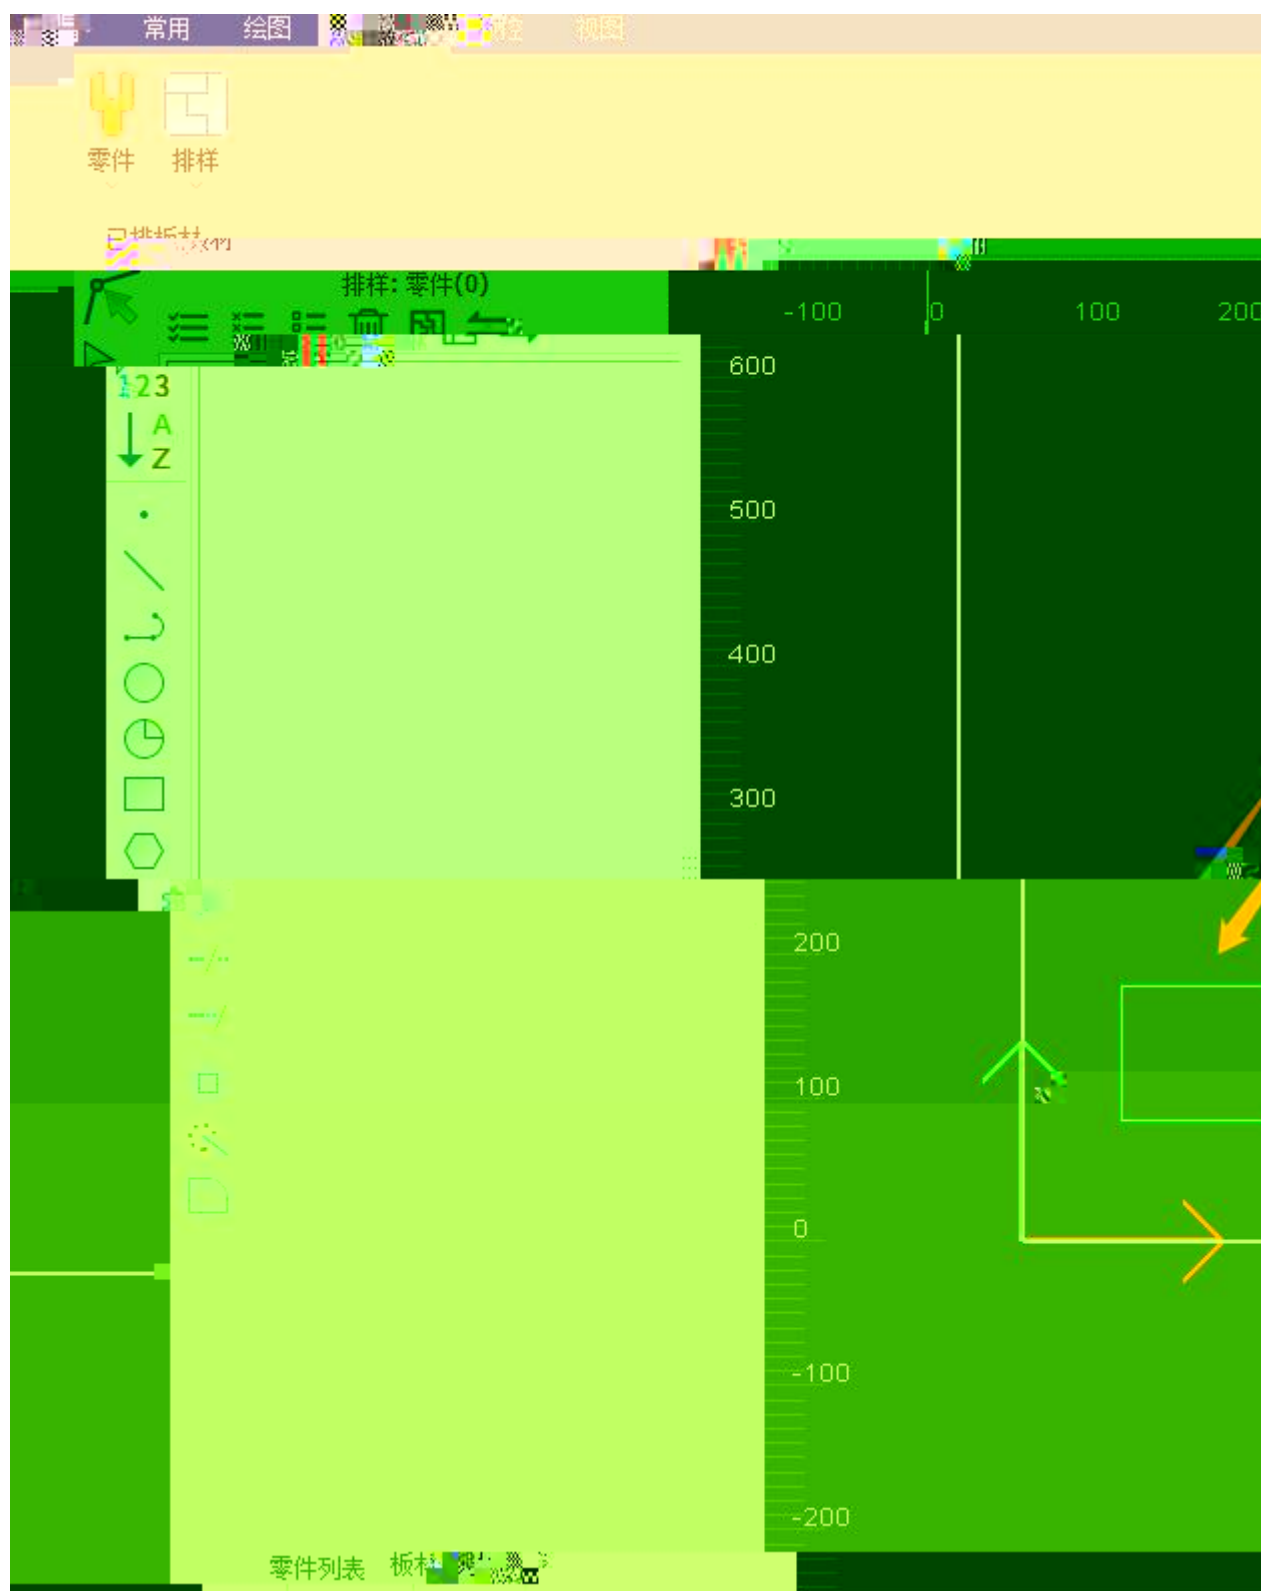


51614 1 1

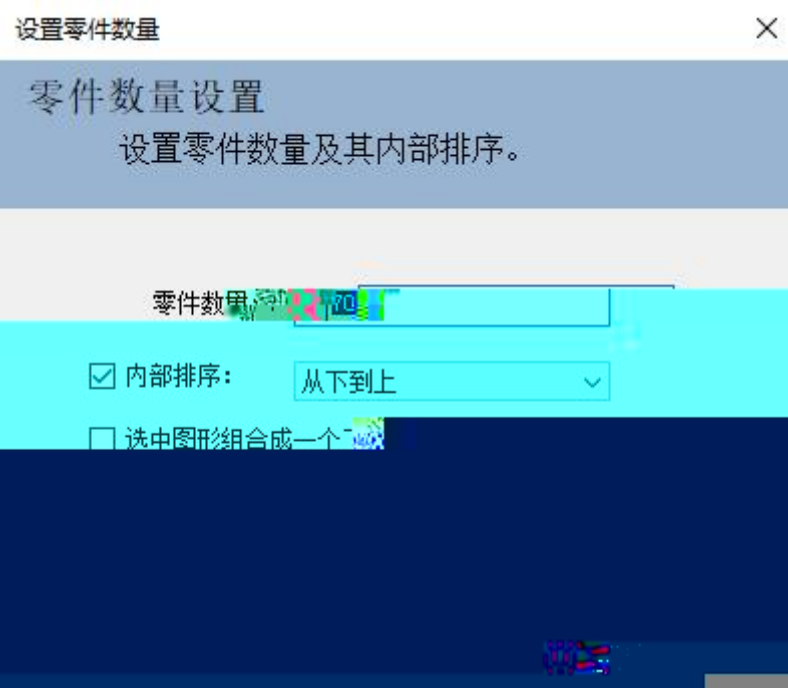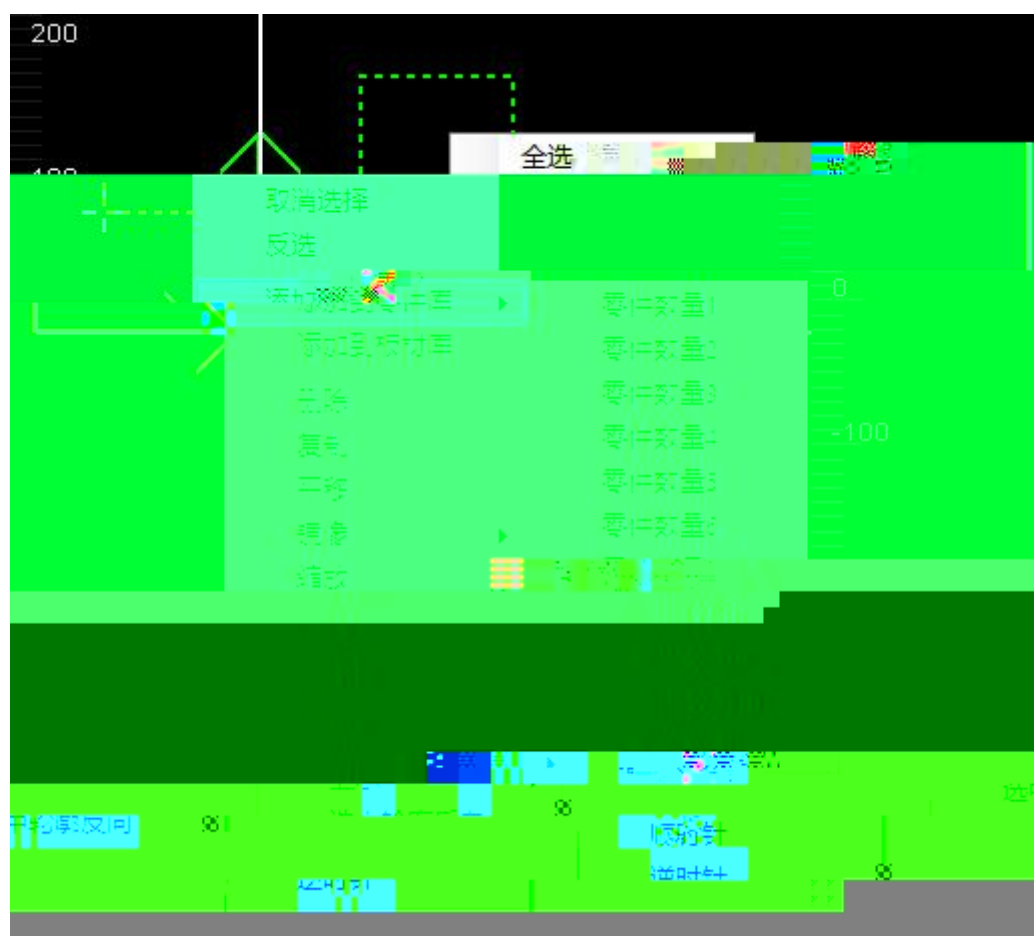

[F6333





51618 ϕ ρ

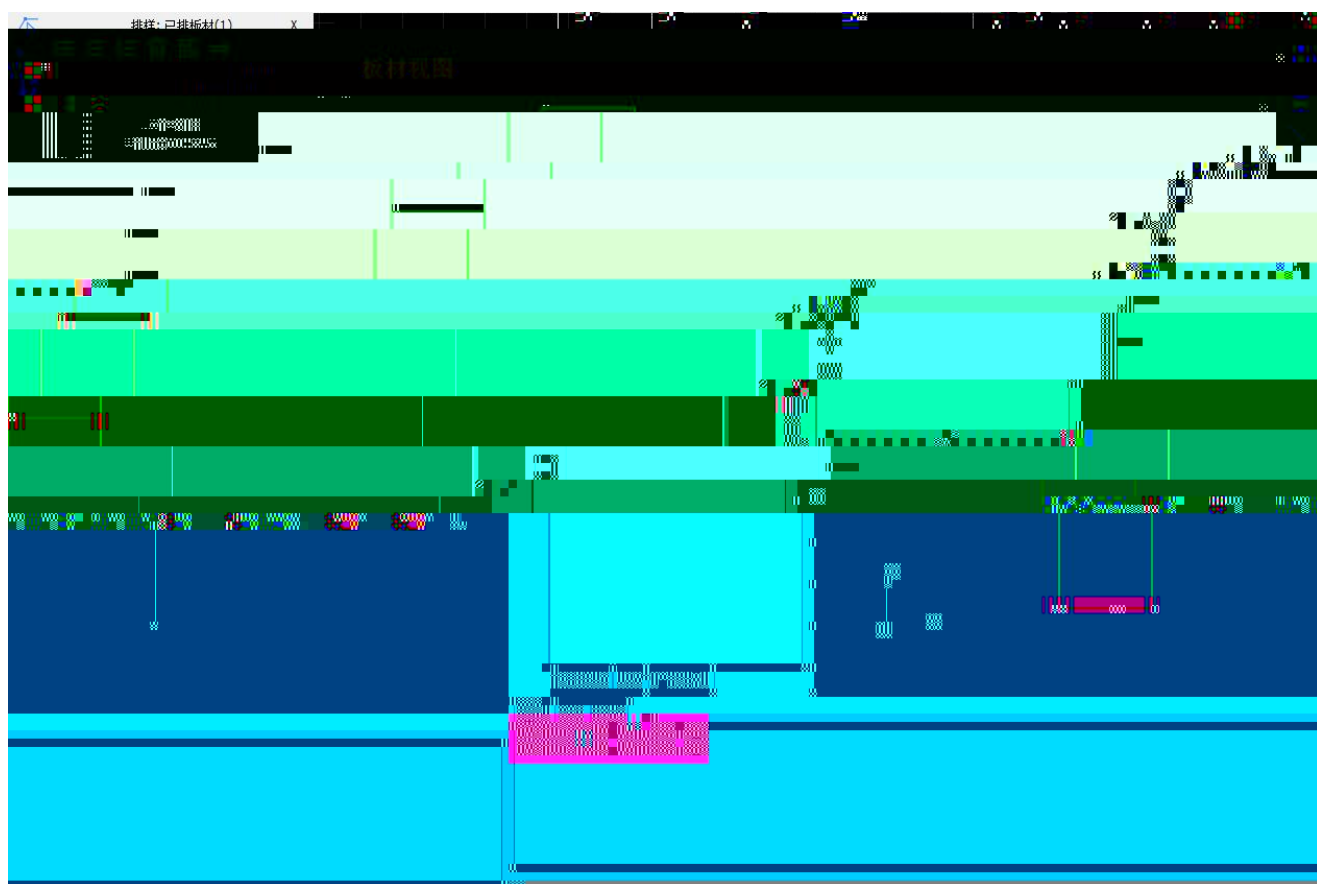

6 š ĩ ↑ ʹ K ʹ

614 'A 5 5 i ^ 5

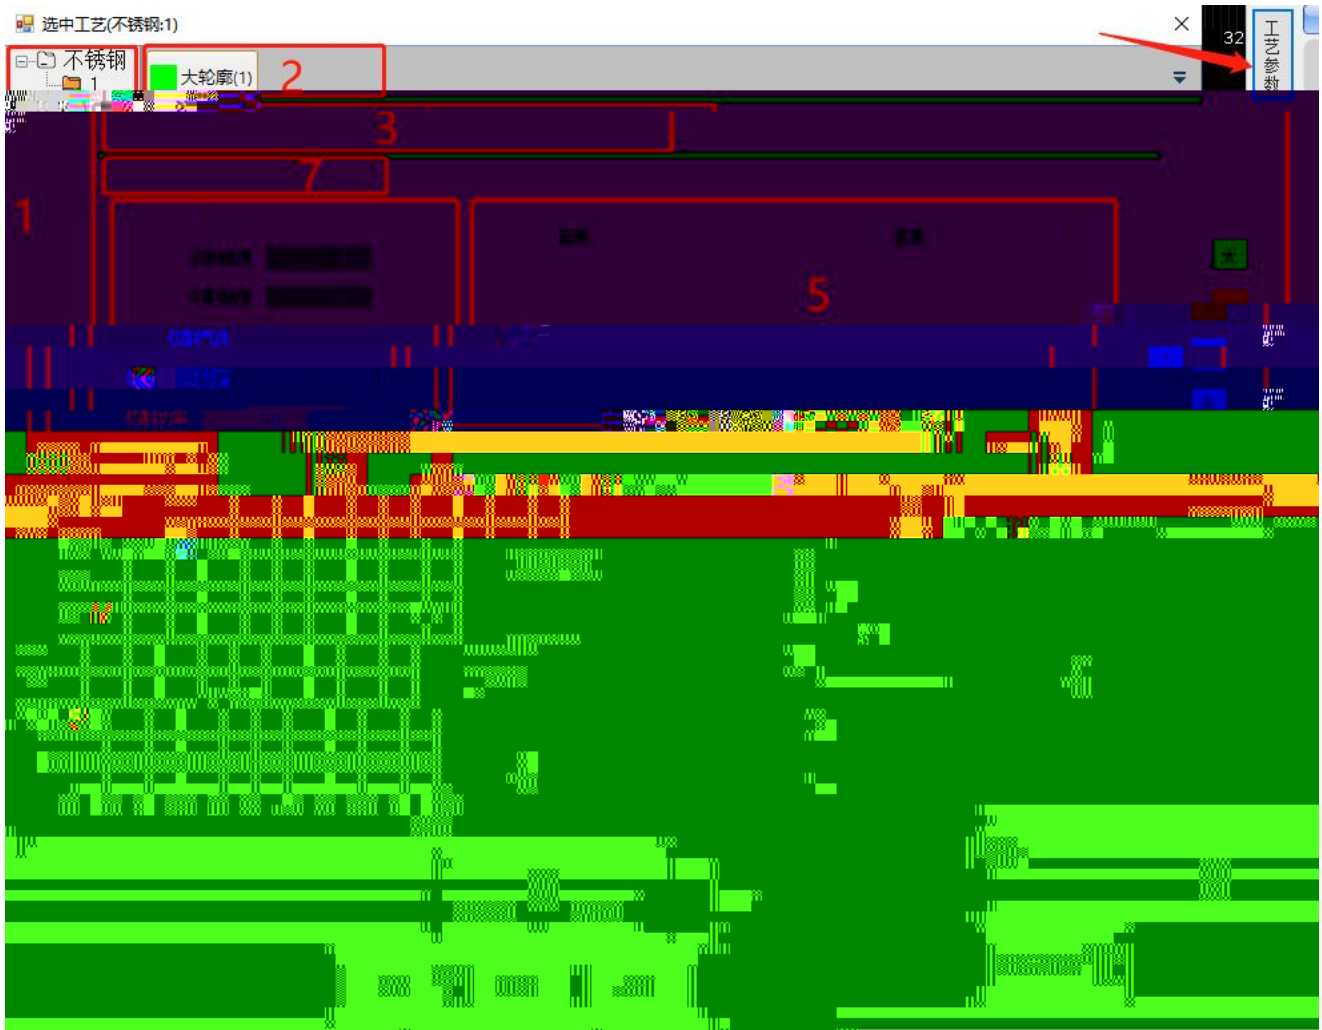







617 I Š ʏ ʘ

618 $\lambda \in \tilde{A}$

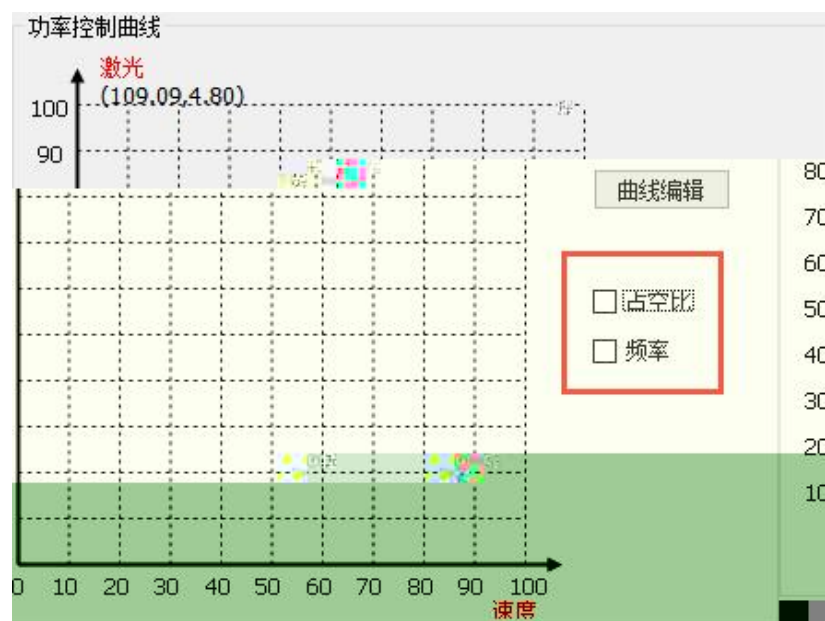

61;. D



° © [REDACTED] 2000 Dž° R@ G

6143 ∫ ⇕

备注

6144 m d m,,

6145 Ƶ P Ʒ Ȧ

--	--	--




材料	
ID:	8
材料	锰钢
英文名	MS

材料厚度配置

材料分类

ID	材料	英文名
1	不锈钢	SS
2	低碳钢	LCS
3	高碳钢	HCS

v . U jg 5hD@€ è %p@•Sñ\$DDR€ £ %oDA


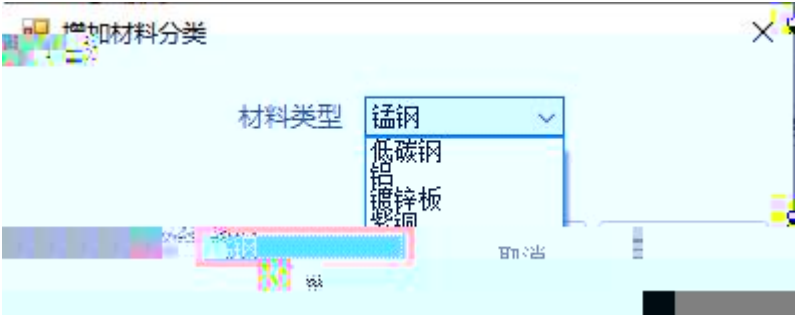


6147 ґ Æ Ғ ґ v ' Û

7 Û' |


714 q ґ




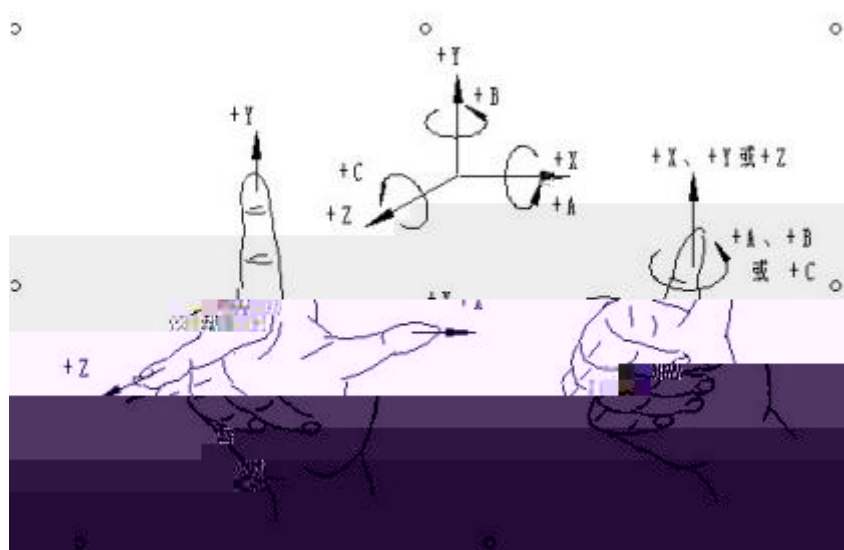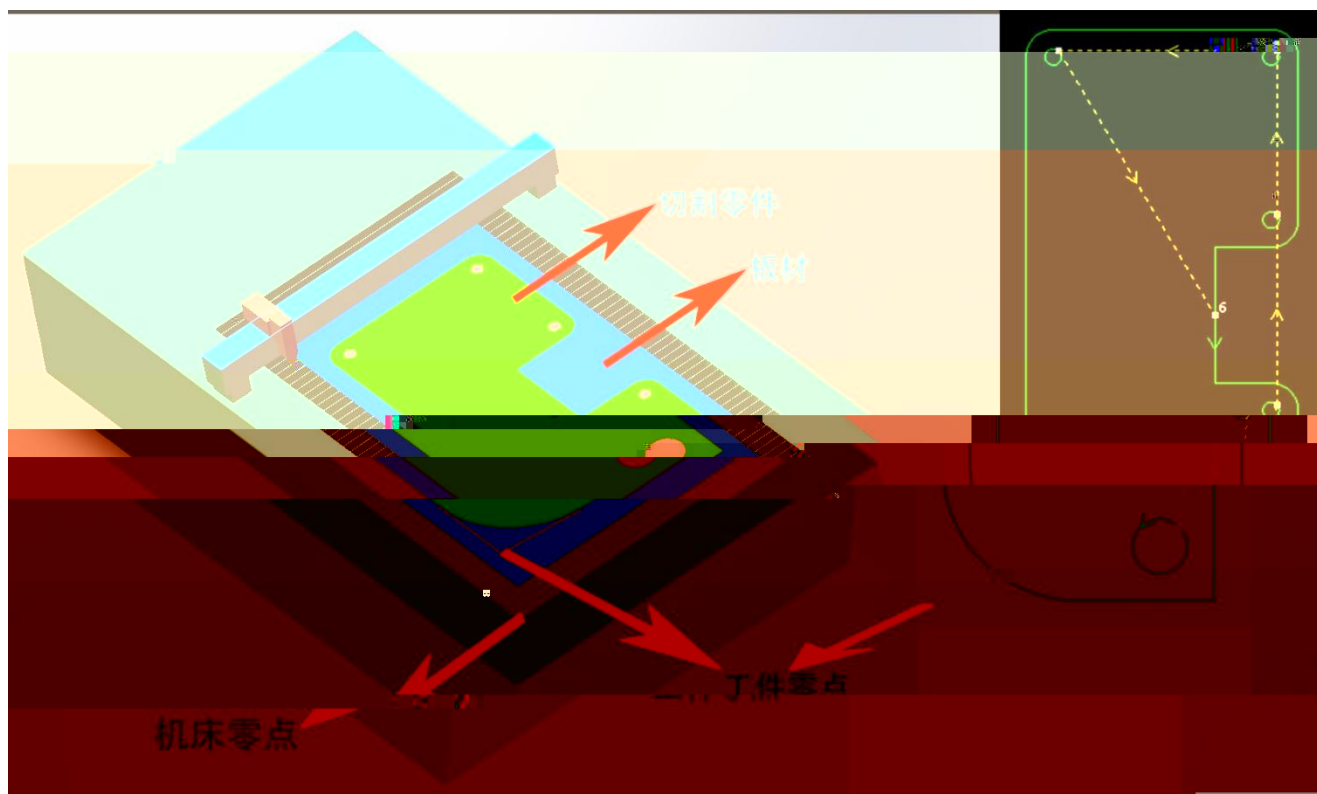

71415 ' Ž q 1



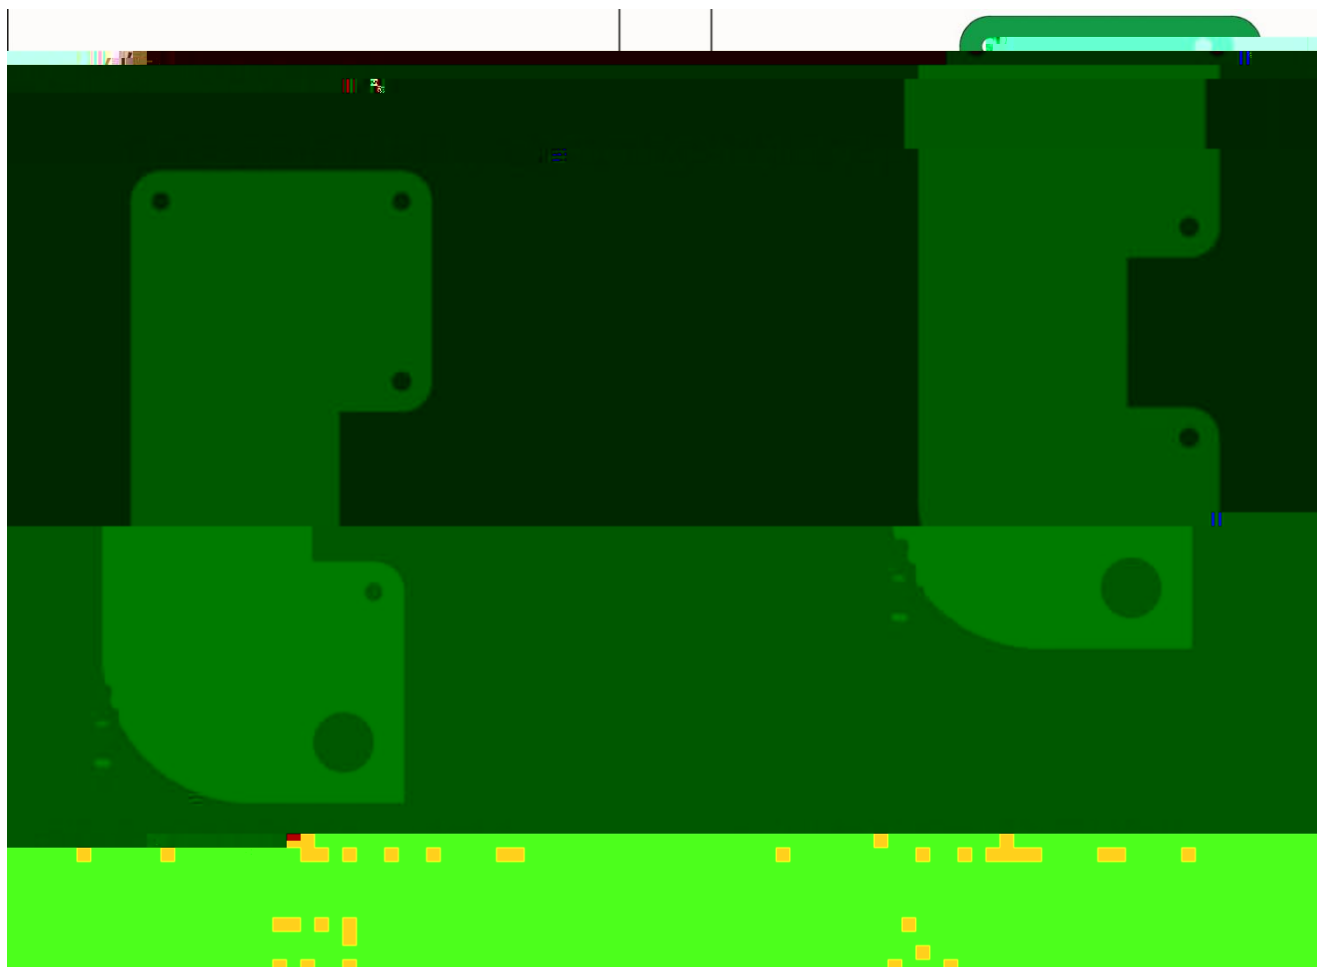

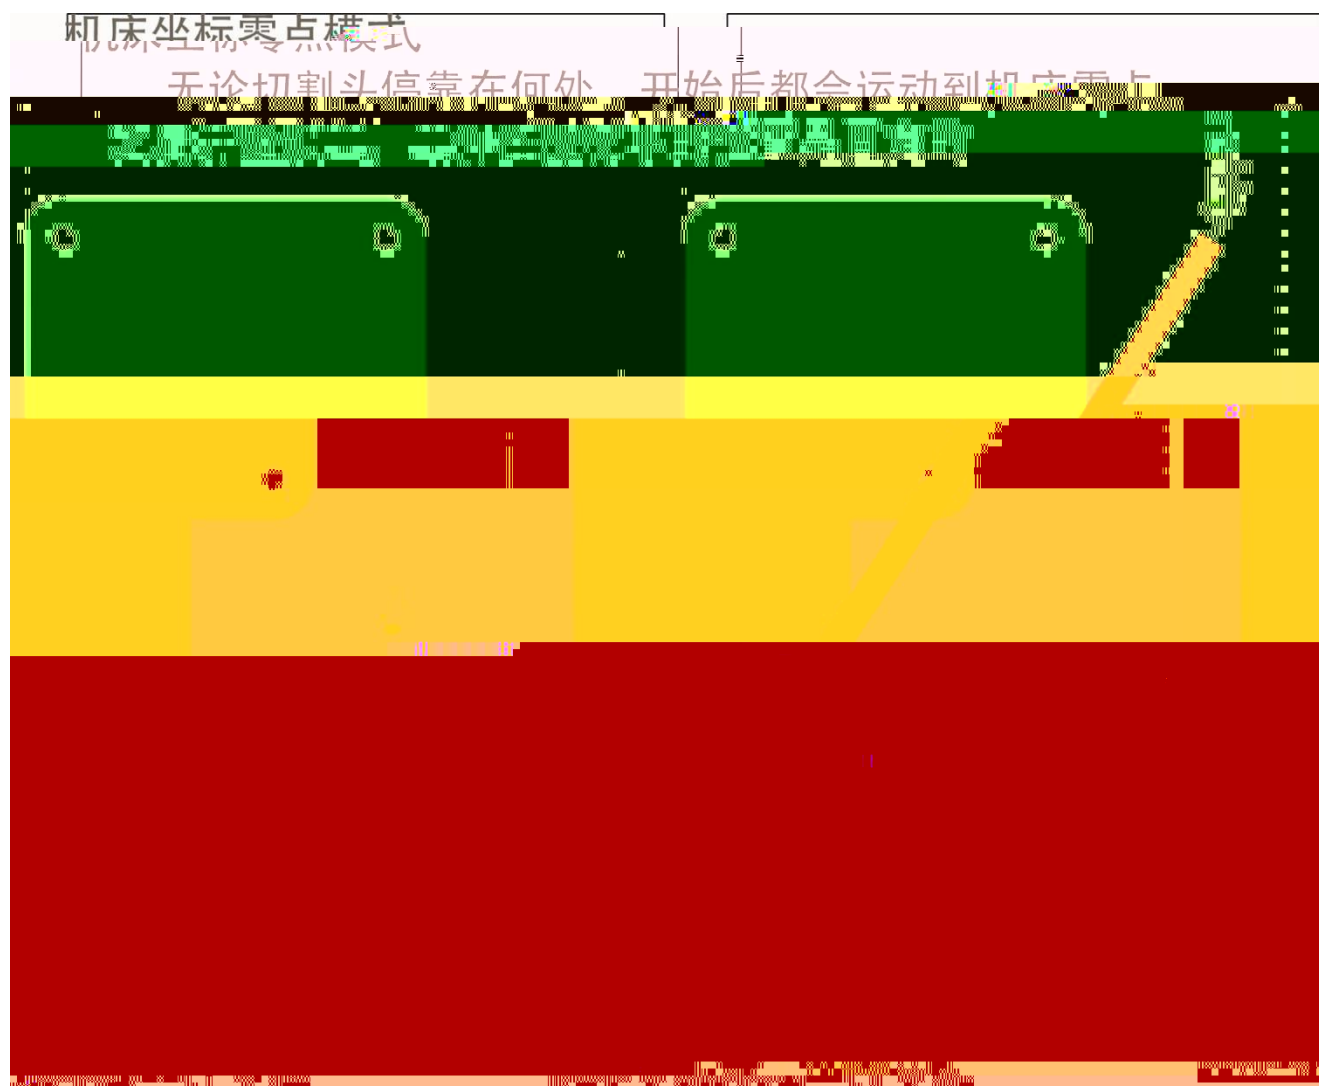

X:446.29 Y:27.0 Z:0.00

- ☒ 显示机械坐标
- ☐ 显示程序坐标
- ☐ 设置机械坐标为零
- ☐ 设置当前点为程序零点

715 ù n ũ'







716 I Š Ů ·





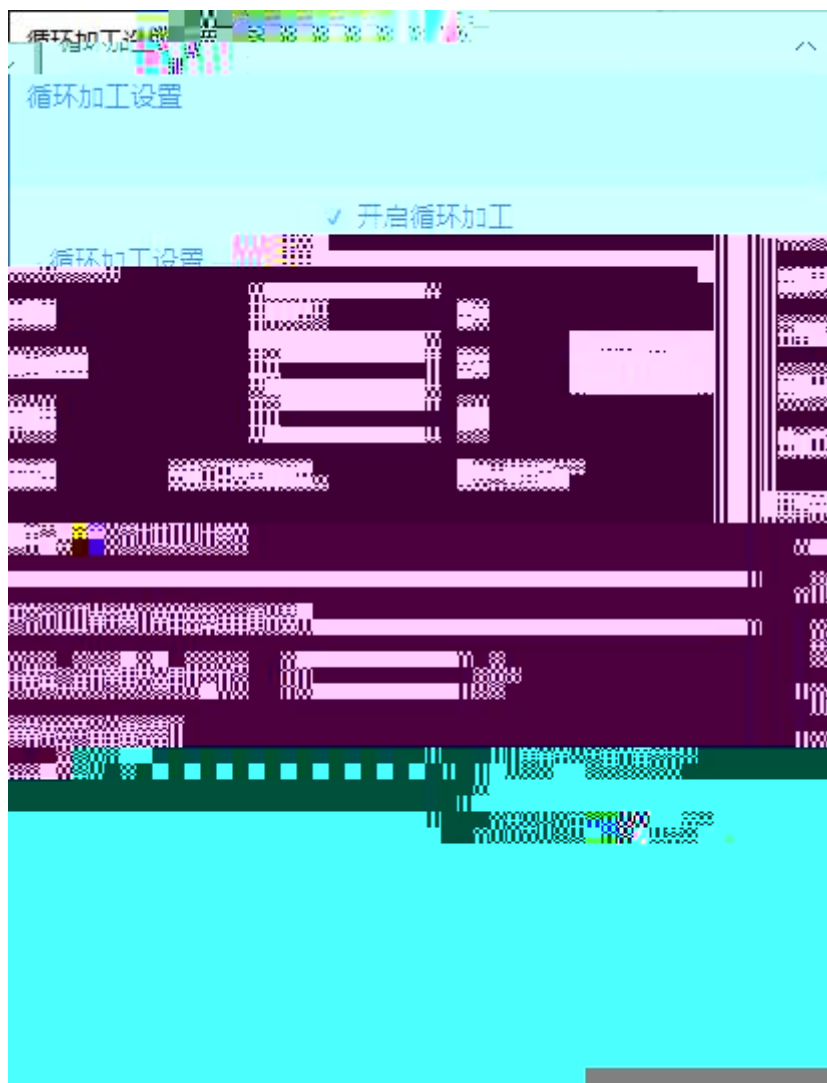


☐ 加工完成自动返回 ☐ 只加工选中图形☐ 启用软限位保护☐ 加工前寻边

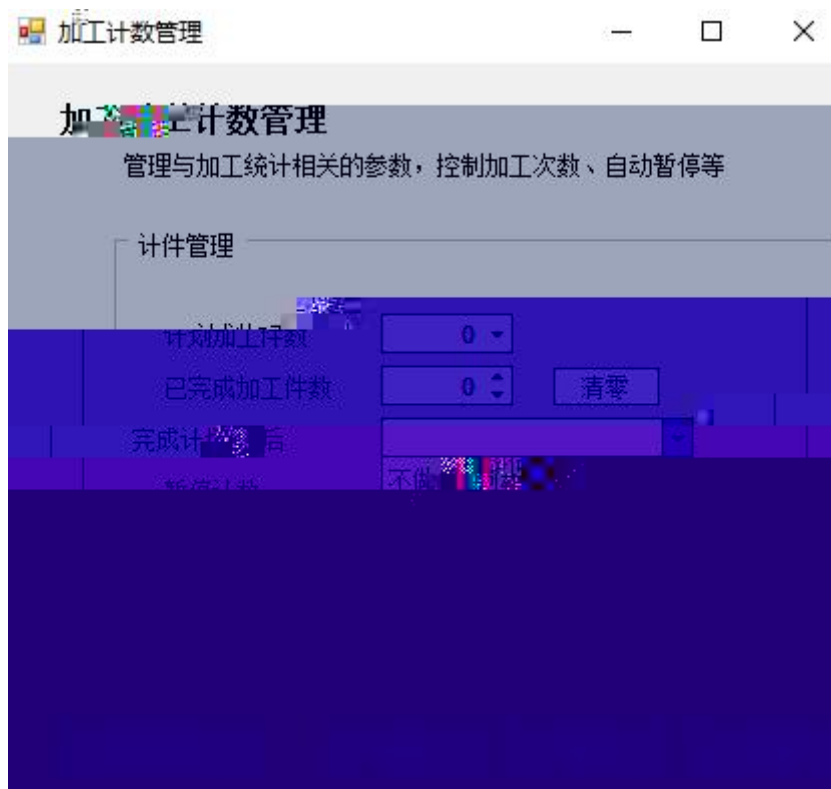

8 7A Ů - U n 1




814 4 'H

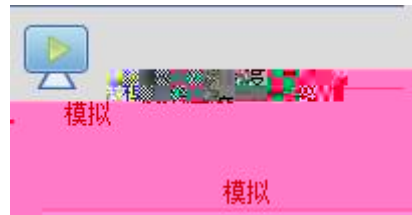



815 ä 1

816 拊 u

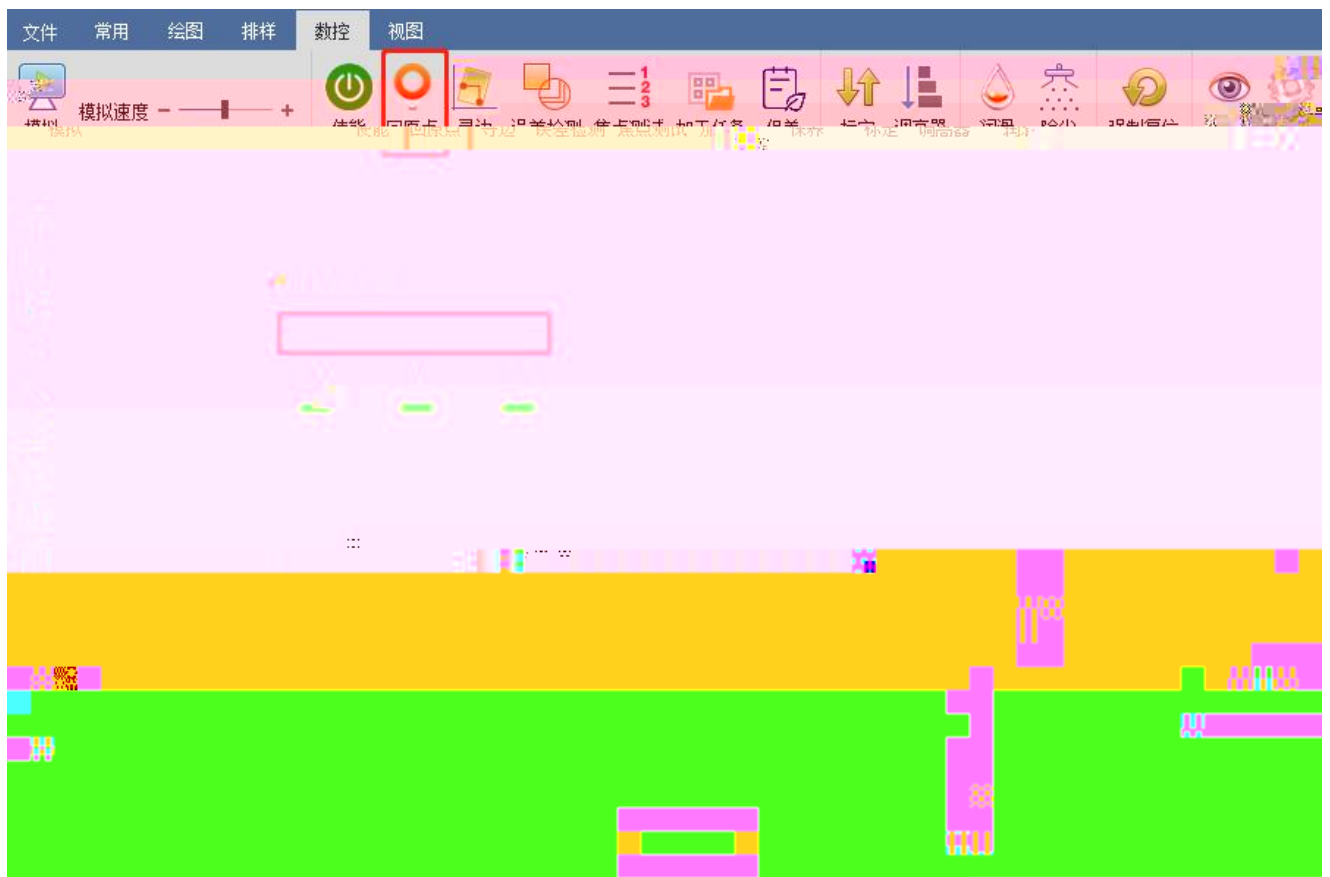

817 M .

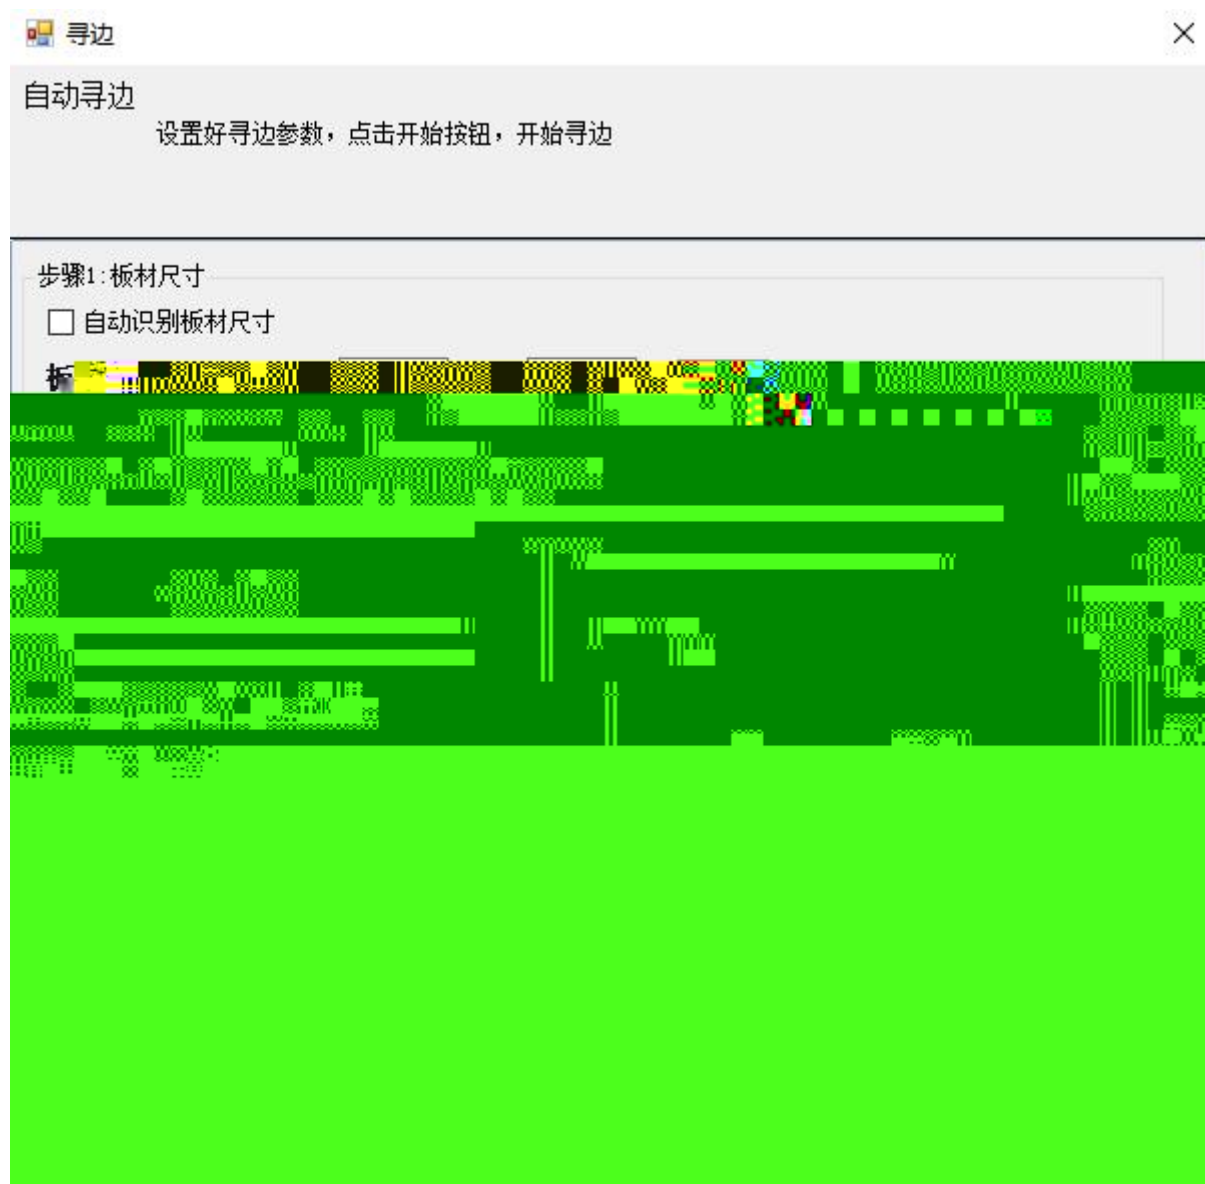

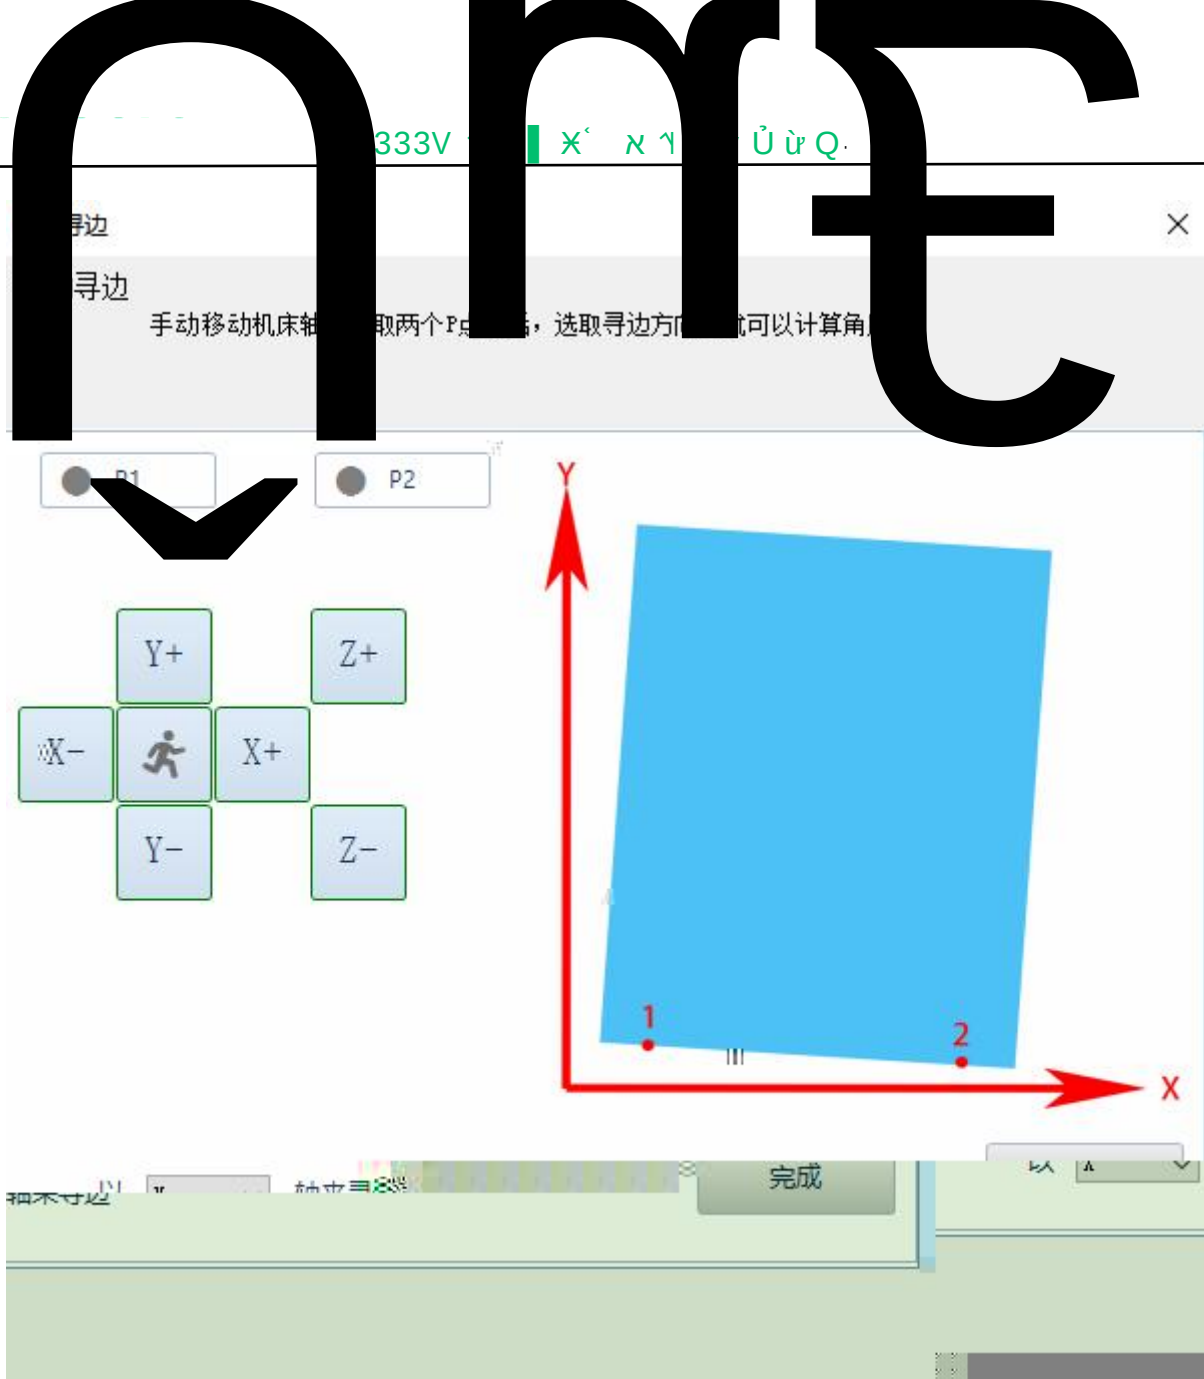

寻边

×

圆盘寻中

圆盘寻中通过3点找到中心

1. 寻边详细参数

寻边高度 毫米

寻边阶跃高度 毫米


寻边速度 米/分



2. 请在指定区域确定寻边起始点



81; ã ğ İ ş

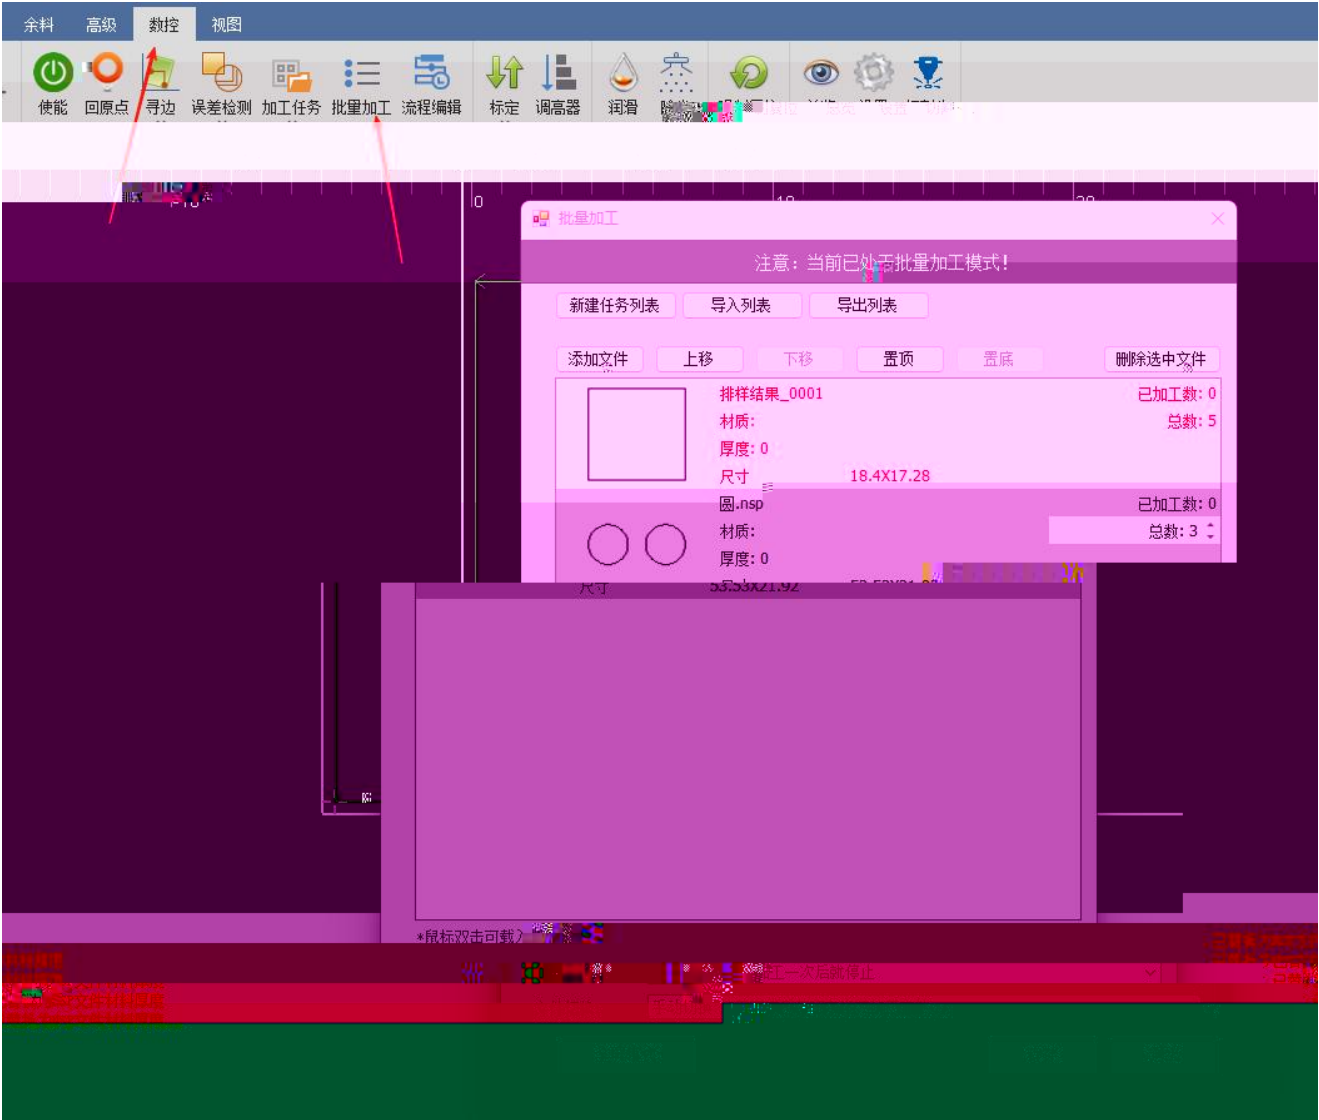

”H Ą Y ʹ~ O

ń~ O

ńd~ O

|| İ ğ T

s`

i`

1 ξ

1 Z

. q c A ñ T


l ş 4 ã

ñ T' O

3 r 4 ã



81< ∫' √ _

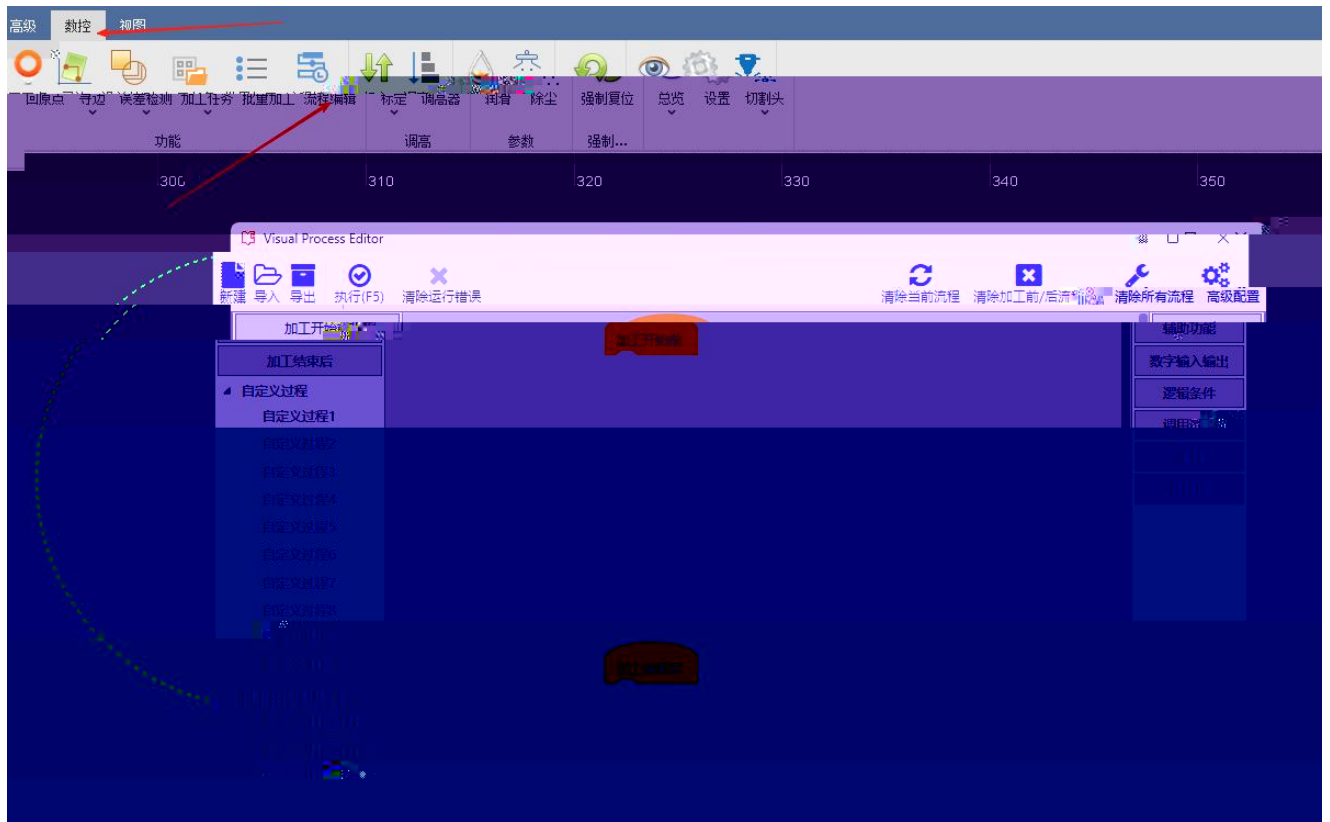

清除加工前/后流程

清除所有流程

高级配置

ʹ ʹ ʹ |

ʹ ʹ ʹ ʹ

ʹ ʹ ʹ ʹ

ʹ ʹ ʹ ʹ ʹ ʹ ʹ

ʹ ʹ ʹ ʹ

ʹ ʹ ʹ ʹ ʹ ʹ


ʹ ʹ ʹ ʹ

ʹ ʹ ʹ ʹ

ʹ ʹ


ʹ

1

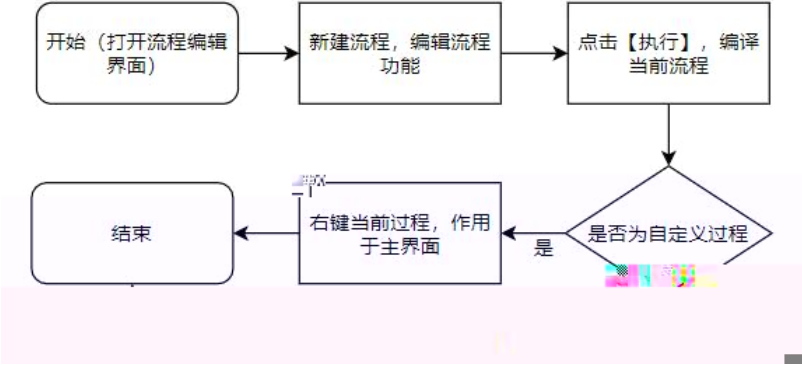



2



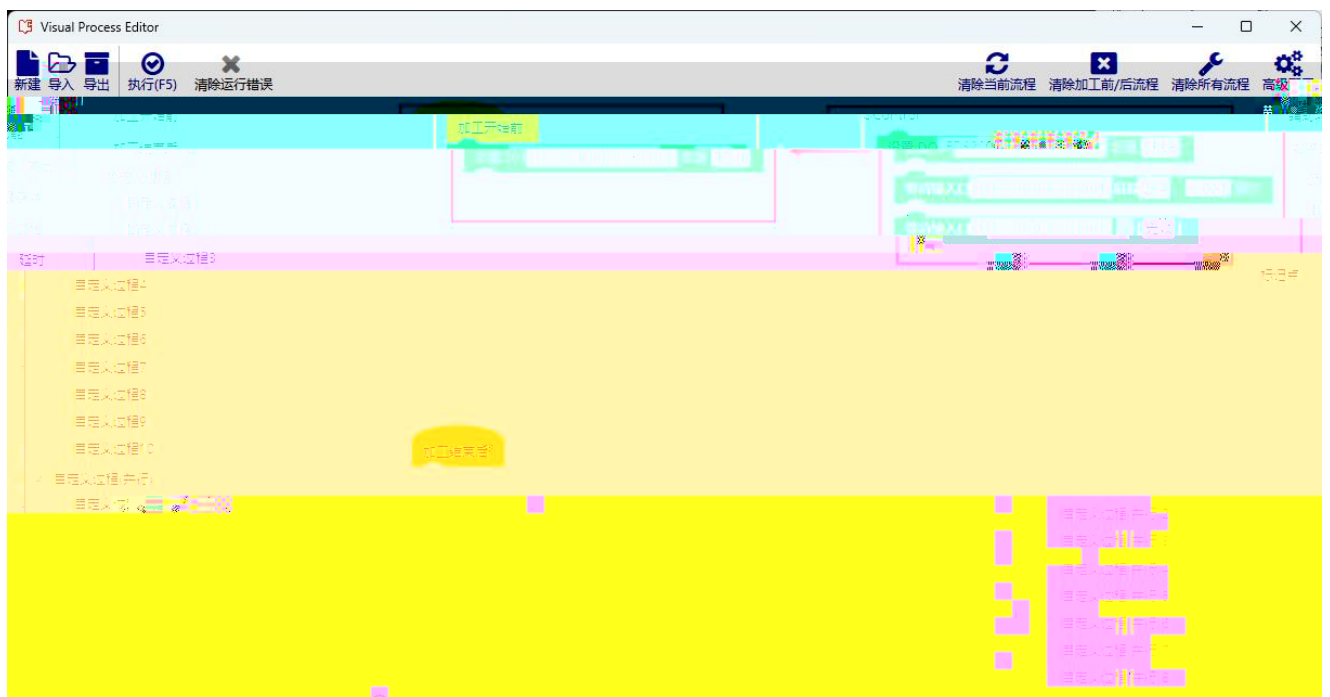



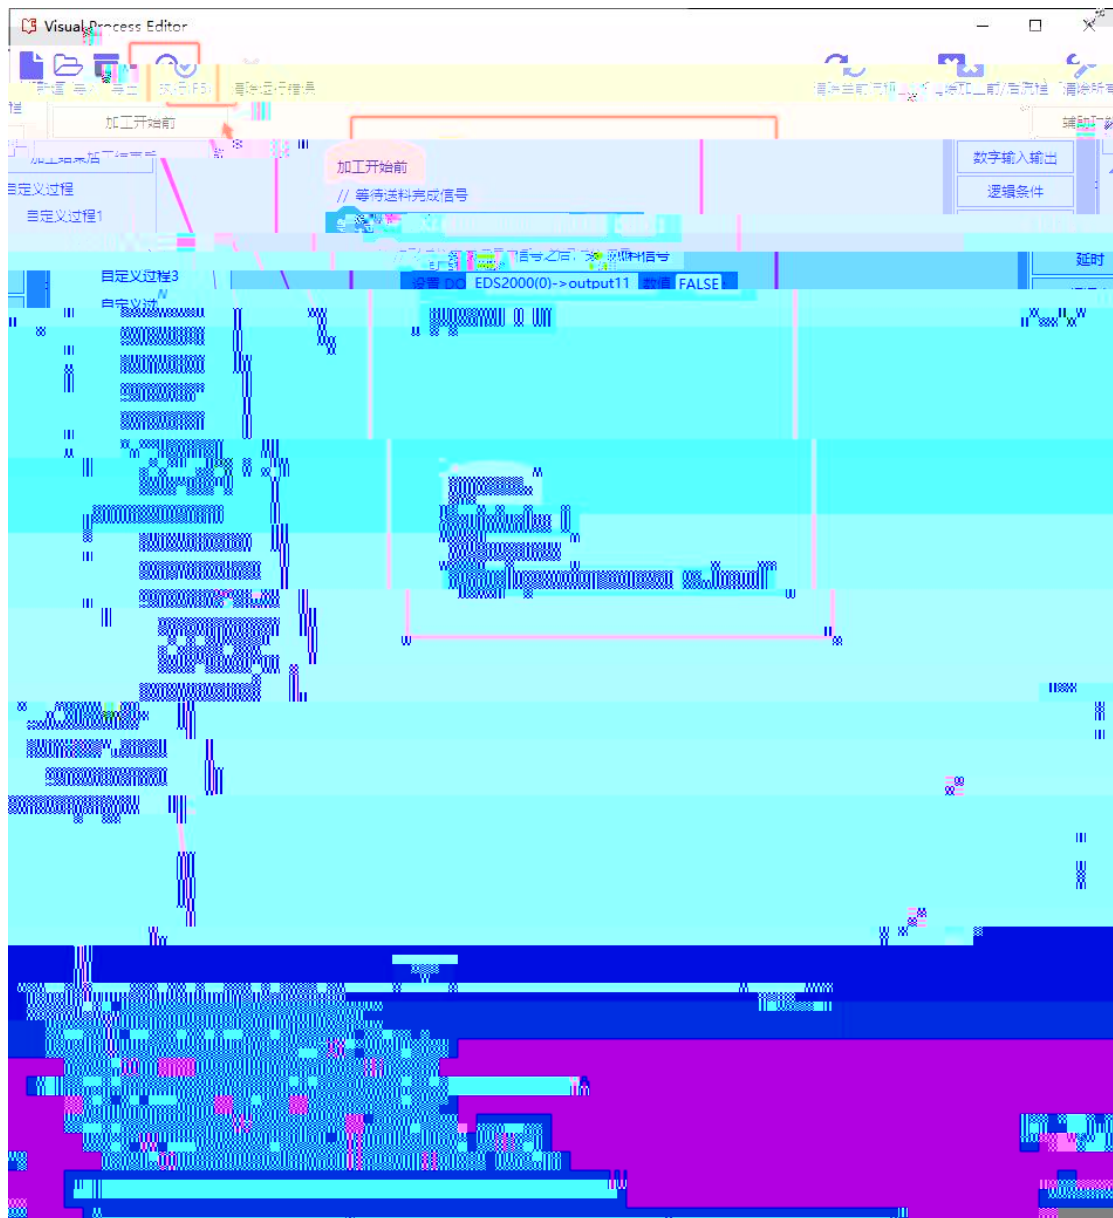

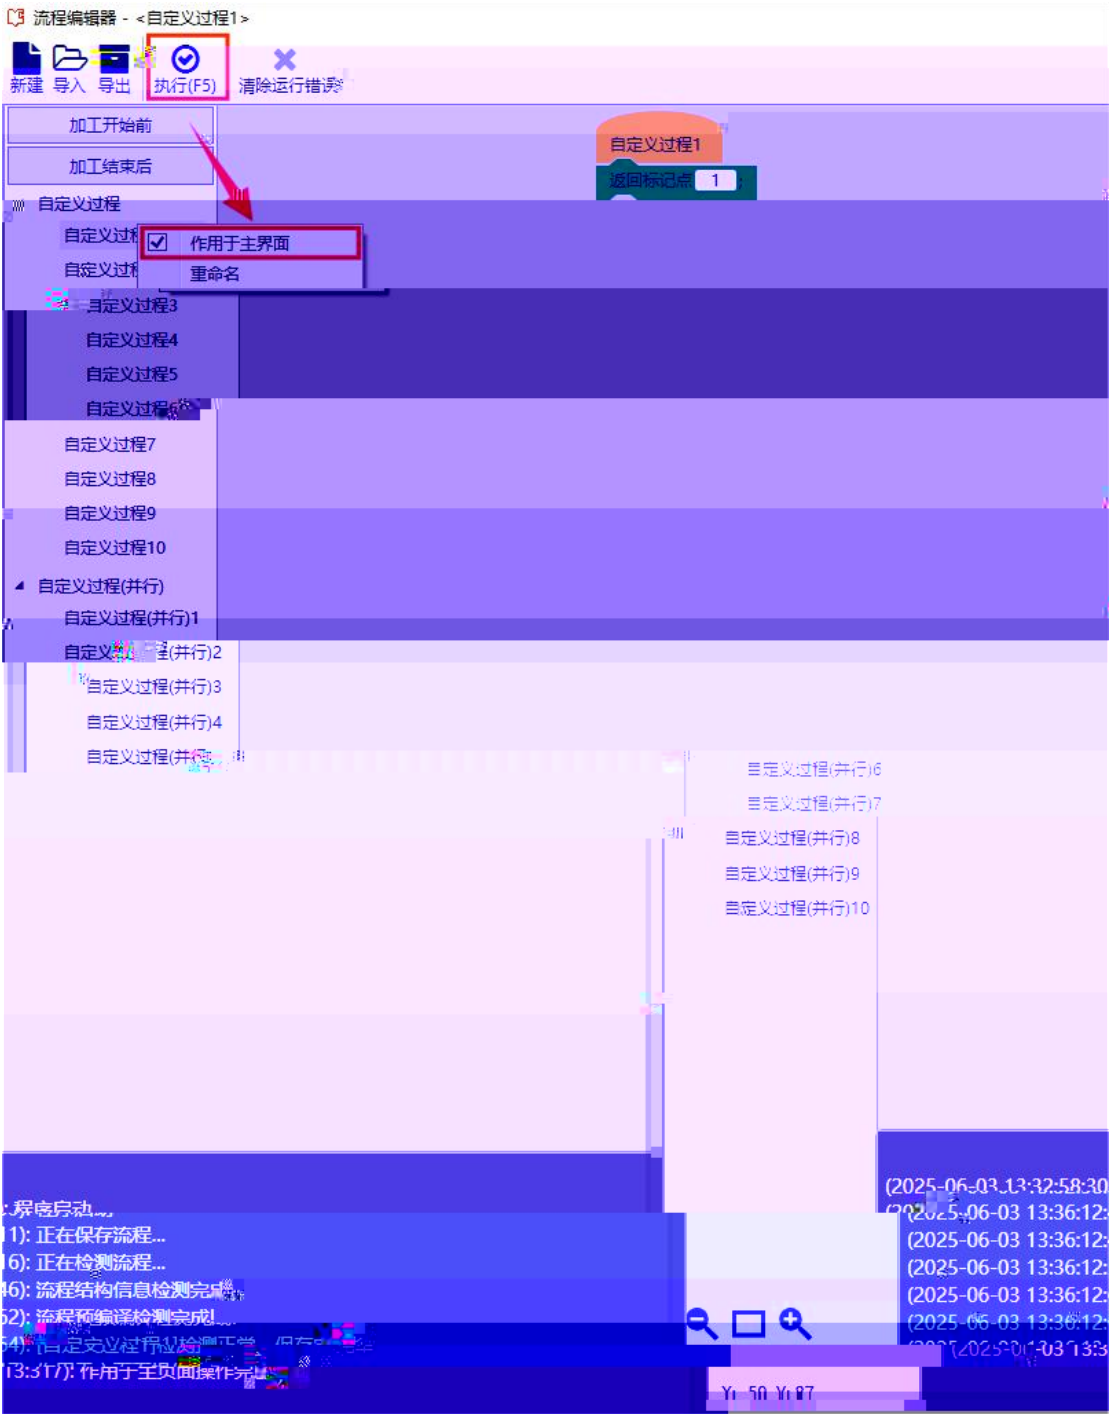


8143 ấ ū "Y ^

8144 3

8145 p 'O l 9 p 'O




8146 = K e Ö 6

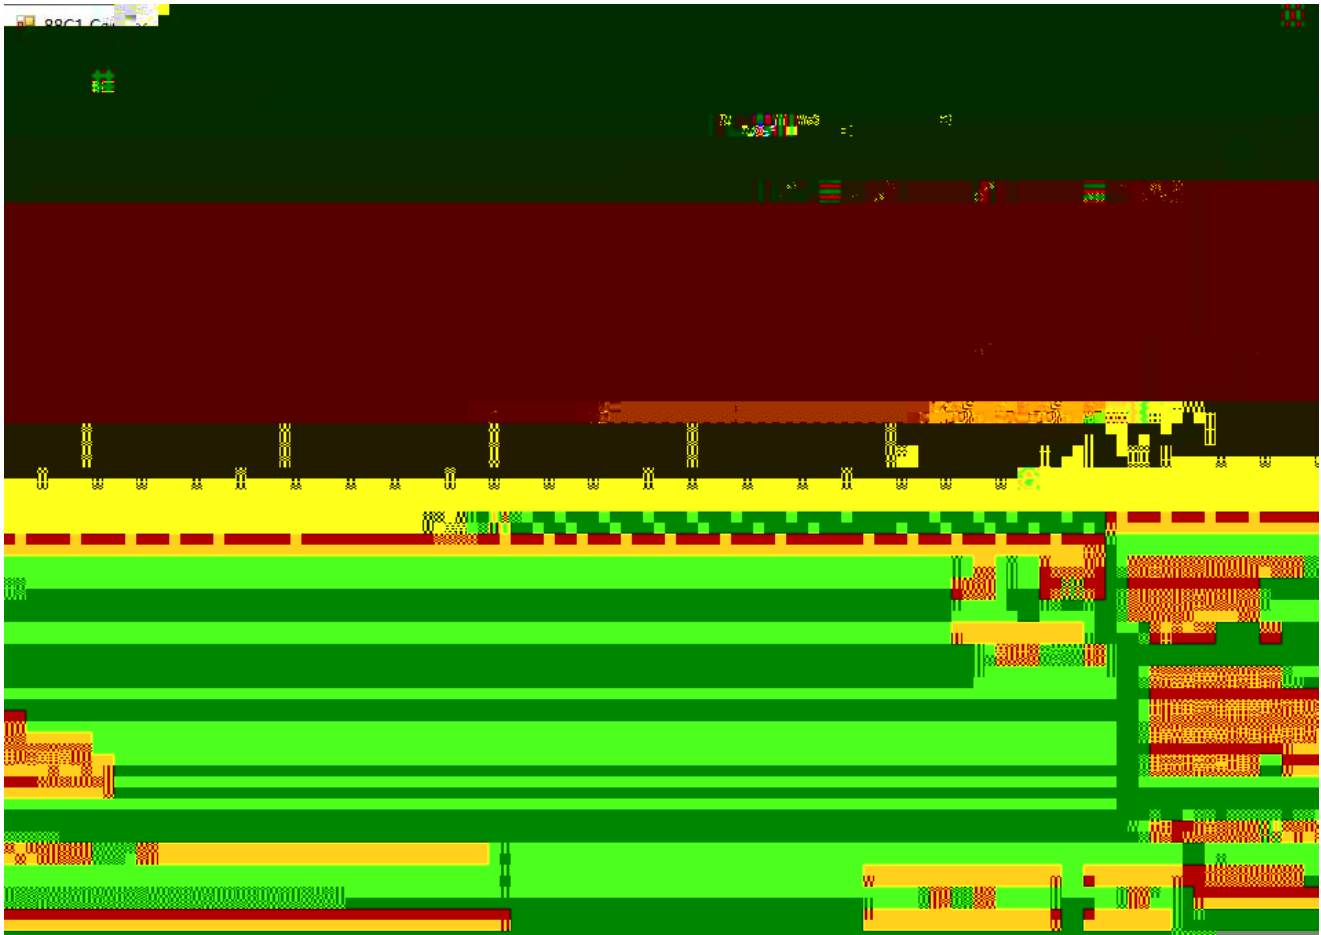


8147 h ° 6 ß Å




814: ^ S T 1

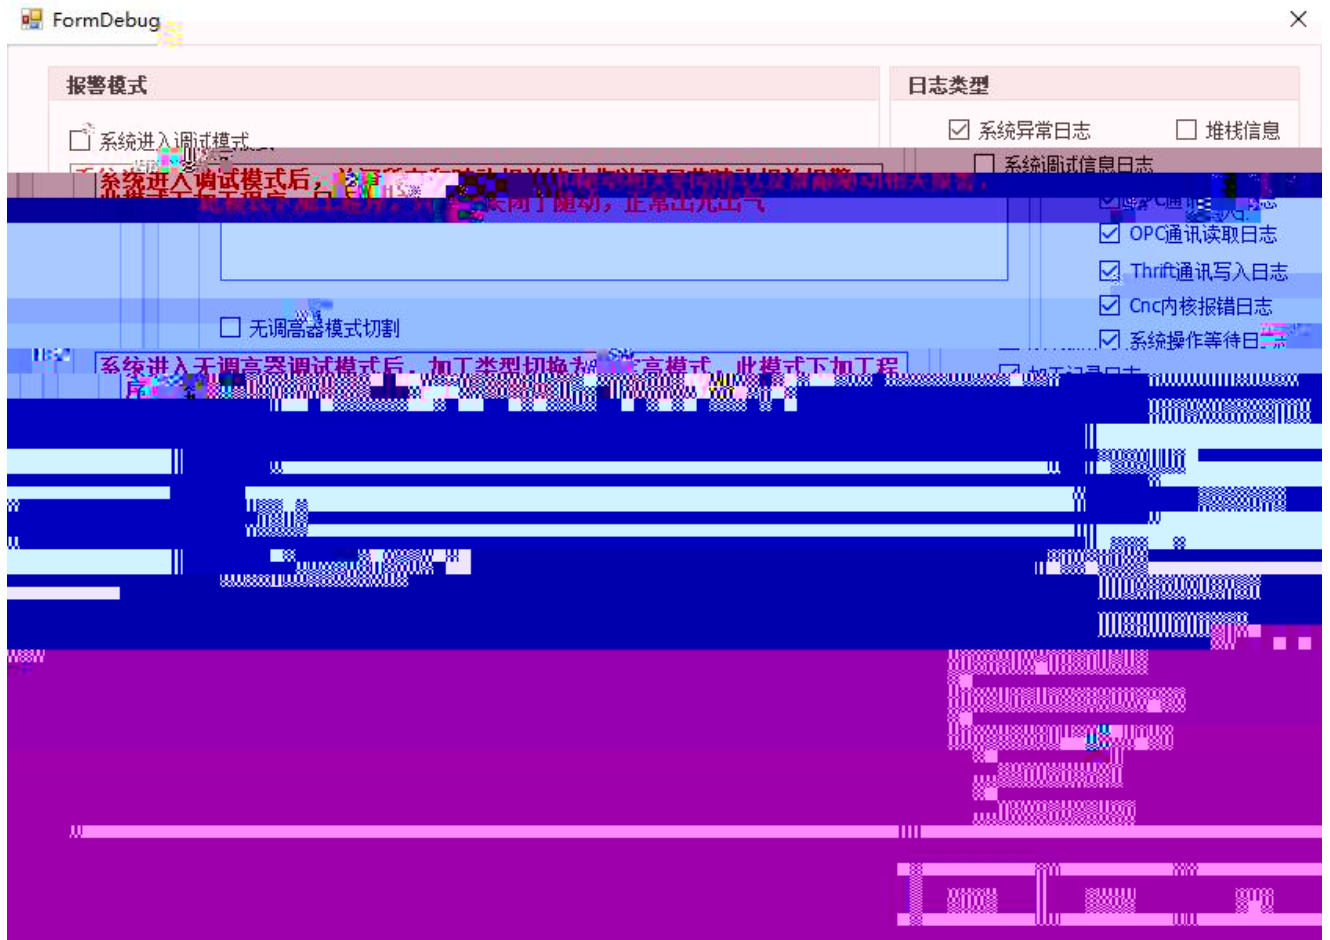

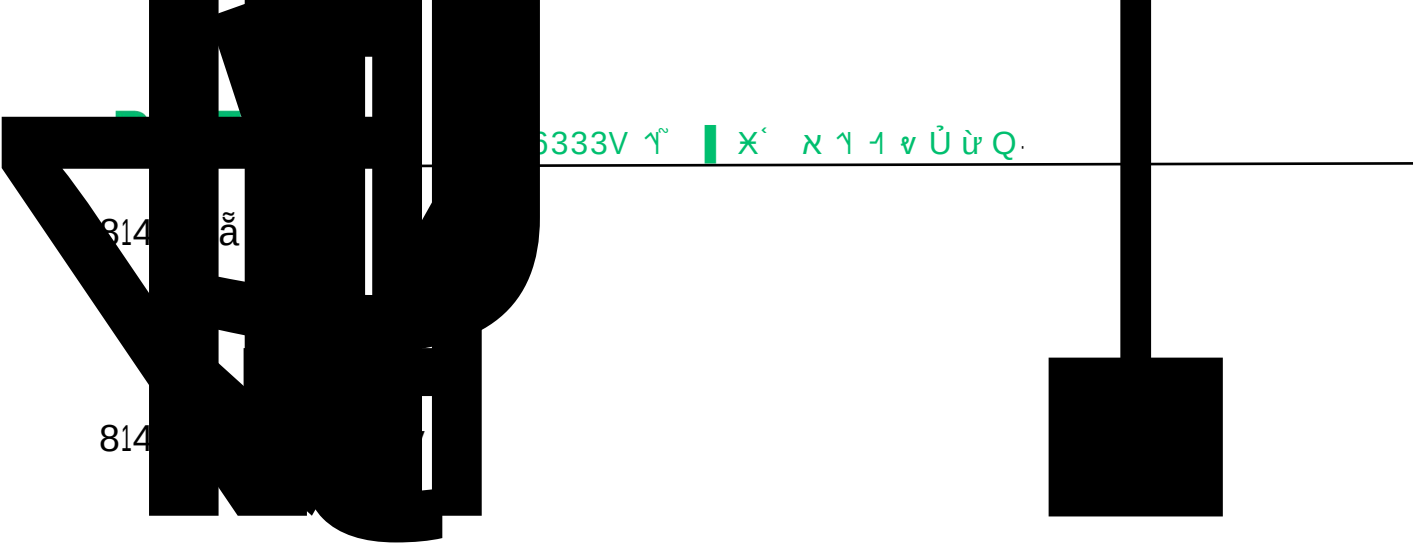



915 ၇ ၂ ဝှ ဝ

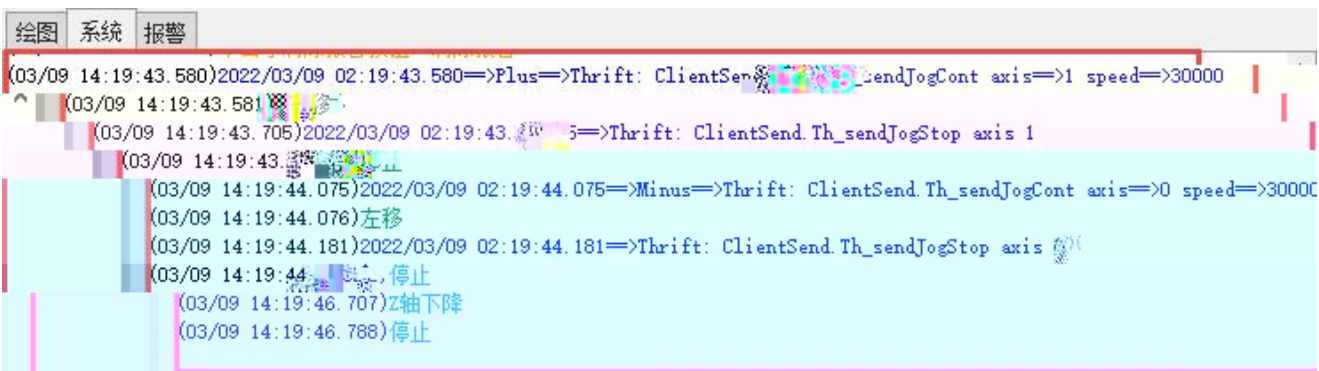

916 7 1 È 3



